US009155961B2

(12) **United States Patent**
Tappeiner et al.

(10) **Patent No.: US 9,155,961 B2**
(45) **Date of Patent: Oct. 13, 2015**

(54) **MOBILE AGENTS FOR MANIPULATING, MOVING, AND/OR REORIENTING COMPONENTS**

(71) Applicant: **Anki, Inc.**, San Francisco, CA (US)

(72) Inventors: **Hanns Tappeiner**, San Francisco, CA (US); **Boris Sofman**, San Francisco, CA (US); **Patrick DeNeale**, Oakland, CA (US)

(73) Assignee: **Anki, Inc.**, San Francisco, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/291,513**

(22) Filed: **May 30, 2014**

(65) **Prior Publication Data**

US 2014/0342834 A1 Nov. 20, 2014

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/963,638, filed on Aug. 9, 2013, now Pat. No. 8,882,560, and a continuation-in-part of application No. 13/707,512, filed on Dec. 6, 2012, now Pat. No. 8,747,182, which

(Continued)

(51) **Int. Cl.**
B25J 9/08 (2006.01)
A63F 13/00 (2014.01)
(Continued)

(52) **U.S. Cl.**
CPC ***A63F 13/00*** (2013.01); ***A63H 17/40*** (2013.01); ***A63H 18/16*** (2013.01); ***A63H 30/04*** (2013.01);

(Continued)

(58) **Field of Classification Search**
CPC . G05D 1/0088; A63H 33/042; A63H 33/046; B25J 9/1617; B25J 9/08; B25J 9/065; G05B 2219/40302; G05B 2219/39146; G05B 2219/40109
USPC 700/248, 249, 250, 253, 257, 258, 259; 901/1, 50
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,307,791 A 12/1981 De Bruine
4,658,928 A 4/1987 Seo
(Continued)

FOREIGN PATENT DOCUMENTS

DE 19532540 3/1997
JP 7016348 1/1995
(Continued)

OTHER PUBLICATIONS

Zlot, Robert et al., "Multi-Robot Exploration Controlled by a Market Economy", 2009 IEEE, 9 pages.

Primary Examiner — Jason Holloway
(74) *Attorney, Agent, or Firm* — Raubvogel Law Office

(57) **ABSTRACT**

Mobile agents automatically manipulate components such as blocks on a working surface, to perform operations such as construction of generalized structures. The working surface and/or the components can have machine-readable codes to assist the agents in maintaining current knowledge of their respective locations. Agents identify components by type and location, and can move components according to directions; such directions can be provided by a user, or can be based on a pre-programmed directive, or can be determined dynamically based on current conditions or in response to actions of other agents. Agents may cooperate with one another. Agents can also respond to changes in the environment, alterations in works in progress, and/or other conditions, and may be configured to exhibit responses simulating emotional reactions. Different mobile agents can be associated with different character traits, which may be configured to change based on environmental conditions and/or the behavior of other mobile agents.

28 Claims, 20 Drawing Sheets

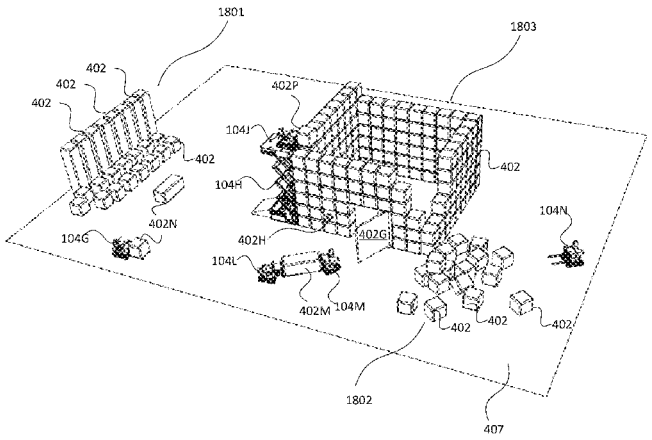

Related U.S. Application Data

is a continuation of application No. 12/788,605, filed on May 27, 2010, now Pat. No. 8,353,737.

(60) Provisional application No. 61/829,419, filed on May 31, 2013, provisional application No. 61/693,687, filed on Aug. 27, 2012, provisional application No. 61/181,719, filed on May 28, 2009, provisional application No. 61/261,023, filed on Nov. 13, 2009.

(51) **Int. Cl.**

B25J 9/16	(2006.01)
G05D 1/00	(2006.01)
A63H 30/04	(2006.01)
A63H 17/40	(2006.01)
A63H 18/16	(2006.01)
A63H 33/04	(2006.01)
A63H 17/32	(2006.01)

(52) **U.S. Cl.**

CPC . ***A63H 33/04*** (2013.01); ***B25J 9/08*** (2013.01); ***B25J 9/1617*** (2013.01); ***G05D 1/0088*** (2013.01); *A63H 17/32* (2013.01); *A63H 33/042* (2013.01); *A63H 33/046* (2013.01); *G05B 2219/39146* (2013.01); *G05B 2219/40109* (2013.01); *G05B 2219/40302* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,203,733	A	4/1993	Patch et al.	
5,361,186	A *	11/1994	Tanie et al.	361/191
5,452,901	A	9/1995	Nakada et al.	
5,697,829	A	12/1997	Chainani et al.	
5,989,096	A	11/1999	Barton et al.	
6,012,957	A	1/2000	Cyrus et al.	
6,157,872	A *	12/2000	Michael	700/247
6,254,478	B1	7/2001	Namanny et al.	
6,477,444	B1 *	11/2002	Bennett et al.	700/245
6,491,566	B2	12/2002	Peters et al.	
6,636,781	B1 *	10/2003	Shen et al.	700/248
6,695,668	B2	2/2004	Donahue et al.	
6,725,128	B2 *	4/2004	Hogg et al.	700/245
6,783,425	B2	8/2004	McKeefery	
6,842,246	B2 *	1/2005	Roufas et al.	356/399
7,097,532	B1	8/2006	Rolicki et al.	
7,753,756	B2	7/2010	McDermott et al.	
7,787,990	B2 *	8/2010	Pietrzyk	700/245
8,160,994	B2	4/2012	Ong et al.	
8,287,372	B2	10/2012	Hong et al.	
8,353,737	B2	1/2013	Sofman et al.	
8,666,547	B2 *	3/2014	Cheung et al.	700/248
8,851,953	B2 *	10/2014	Oschuetz et al.	446/91
2002/0102910	A1	8/2002	Donahue et al.	
2002/0115373	A1 *	8/2002	Lazerman	446/85
2003/0060287	A1	3/2003	Nishiyama	
2003/0097203	A1 *	5/2003	Michael	700/247
2003/0109958	A1 *	6/2003	Hogg et al.	700/245
2003/0232649	A1	12/2003	Gizis et al.	
2004/0068415	A1 *	4/2004	Solomon	705/1
2004/0134336	A1 *	7/2004	Solomon	89/1.11
2004/0134337	A1 *	7/2004	Solomon	89/1.11
2004/0162638	A1 *	8/2004	Solomon	700/247
2004/0266506	A1	12/2004	Herbrich et al.	
2005/0186884	A1	8/2005	Evans	
2006/0073760	A1	4/2006	Tremel et al.	
2006/0073761	A1	4/2006	Weiss et al.	
2006/0095159	A1 *	5/2006	Desmond	700/245
2006/0223637	A1	10/2006	Rosenberg et al.	
2007/0017984	A1	1/2007	Mountz et al.	
2007/0021863	A1	1/2007	Mountz et al.	
2007/0021864	A1	1/2007	Mountz et al.	
2007/0173171	A1	7/2007	Pal Benedek et al.	
2007/0173177	A1	7/2007	Hirokawa et al.	
2007/0293124	A1	12/2007	Smith et al.	
2008/0026671	A1	1/2008	Smith et al.	
2009/0004948	A1	1/2009	Ando et al.	
2009/0111356	A1	4/2009	Haass et al.	
2009/0284553	A1	11/2009	Seydoux	
2010/0093255	A1	4/2010	Yamamoto	
2010/0099493	A1	4/2010	Horovitz	
2010/0178966	A1	7/2010	Seydoux	
2010/0203933	A1	8/2010	Eyzaguirre et al.	
2010/0230198	A1	9/2010	Frank et al.	
2010/0304640	A1	12/2010	Sofman et al.	
2012/0238366	A1	9/2012	Tedder	
2013/0190090	A1	7/2013	Lin	

FOREIGN PATENT DOCUMENTS

JP	2001022264	1/2001
JP	2003346240	12/2002
JP	2005185655	7/2005
KR	100842566	7/2008
WO	2009037677	3/2009

* cited by examiner

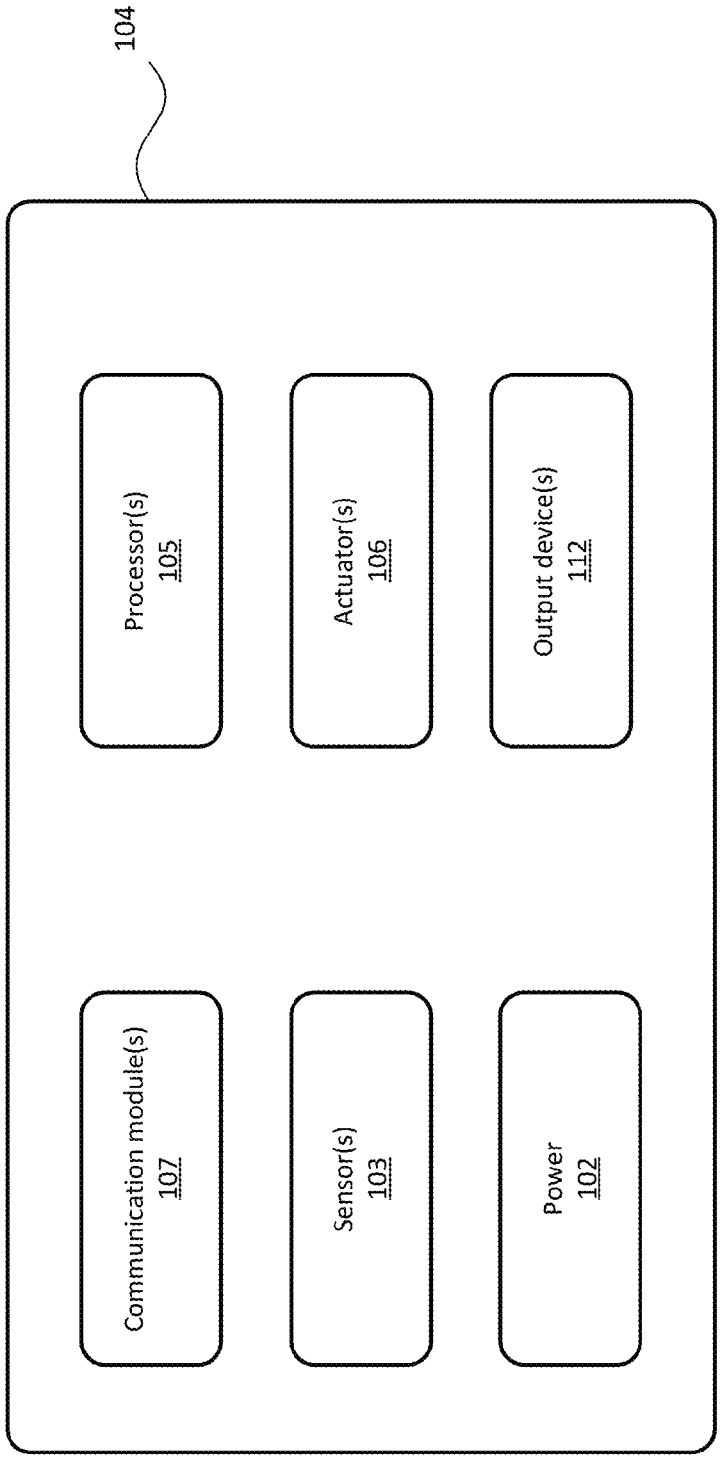
104
Processor(s)
105
Actuator(s)
106
Output device(s)
112
Communication module(s)
107
Sensor(s)
103
Power
102

FIG. 1

201

	PERSONALITY	t_s	A_s	POSITIVE EMOTIONAL EXPRESSION	POSITIVE PHYSICAL ACTION	NEGATIVE EMOTIONAL EXPRESSION	NEGATIVE PHYSICAL ACTION	MODERATION RESPONSE	CONFUSED RESPONSE
A	Extroverted Positive (enthusiastic, bubbly)	45s	5	Excitement	Cheer/fanfare, RESUME TASK and travel quickly in flourished route to destination	Sympathetic disappointment, reset A to zero, REPEAT REQUEST, do not increment A	Drive toward user and offer encouraging words of support	Encourage user that user performance is bound to improve	
B	Sensitive Positive (shy)	90s	2	Suppressed glee	Short sigh of relief and happy beep	Dejection	Retreat to corner of mat and enter "sulk" state	<none>	
C	Reserved Positive	120s	4	Polite gratitude	Courteous nod	<none>	Face user and politely remind user of request	Thank user for eventually satisfying request	
D	Reserved Neutral (stoic)	180s	3	<none>	<none>	<none>	<none>	<none>	
E	Cynical Negative	60s	2	Surprise	Pessimistic Muttering	Griping over poor treatment as typical	Grumbling to self while driving in circles	Sarcastically educate user about user's role	
F	Sensitive Negative (temperamental, impatient)	30s	1	Satisfied chirp	Proudly and smugly driving to destination (slowly and with some extravagance of motion)	Loud complaining to user and threats to other mobile agents	Tirade at user, driving back-forth, knocking down completed work, disrupting others	Chastisement of user for poor management, demands for improvement	

FIG. 2

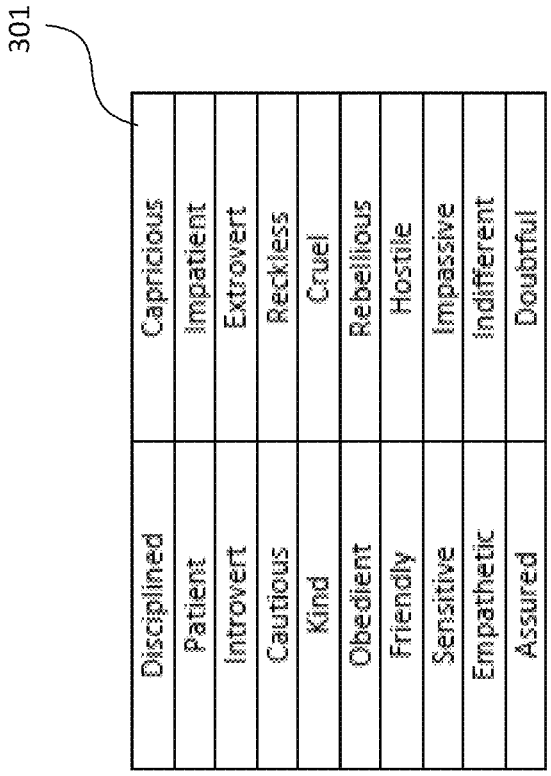
301
Disciplined
Patient
Introvert
Cautious
Kind
Obedient
Friendly
Sensitive
Empathetic
Assured
Capricious
Impatient
Extrovert
Reckless
Cruel
Rebellious
Hostile
Impassive
Indifferent
Doubtful

FIG. 3

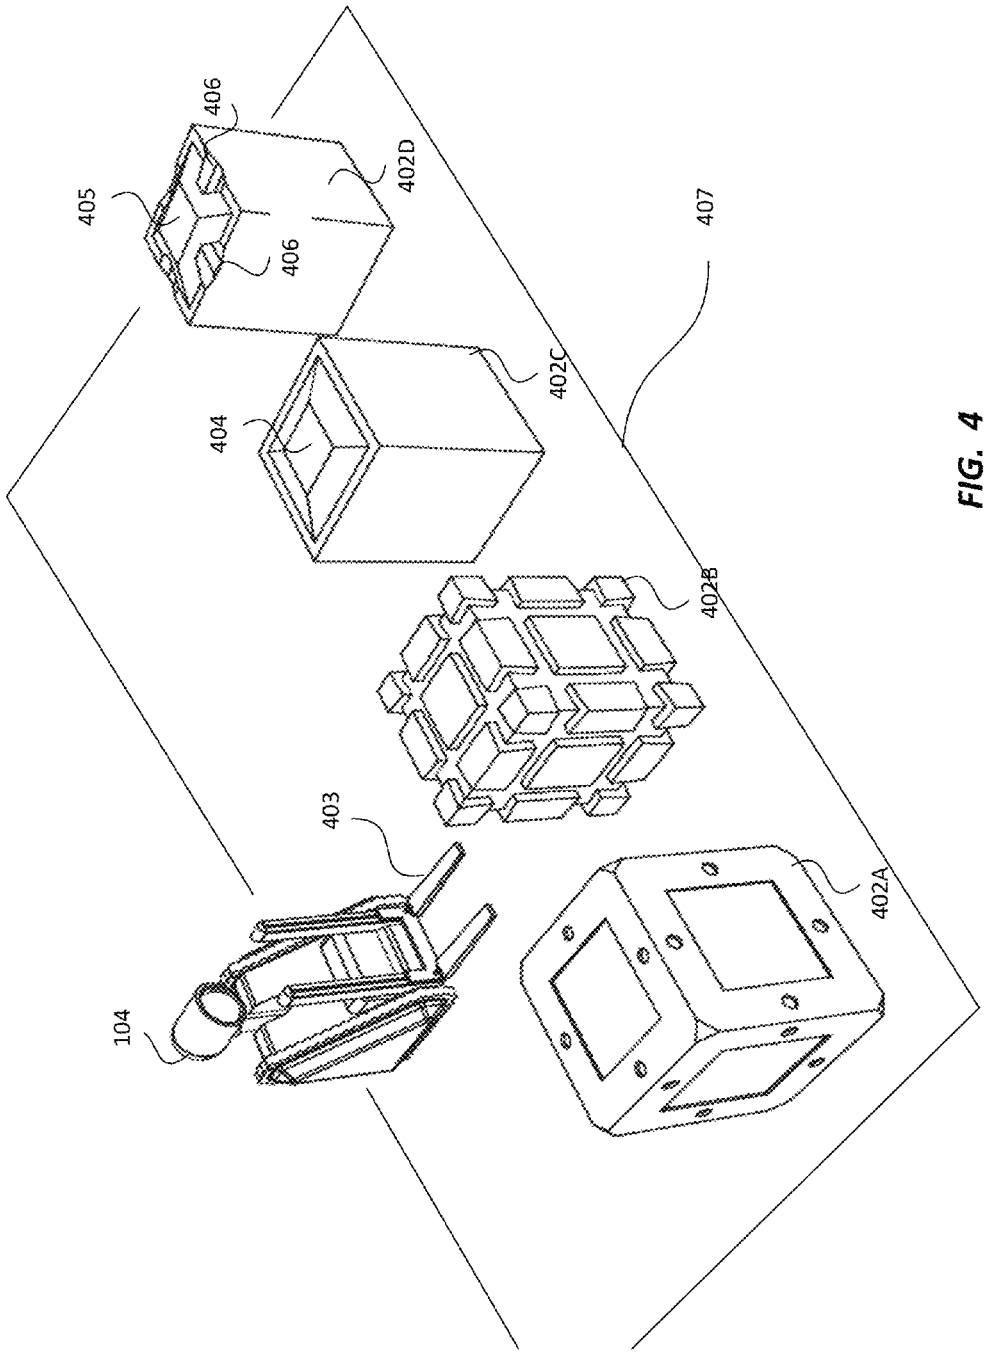

FIG. 4

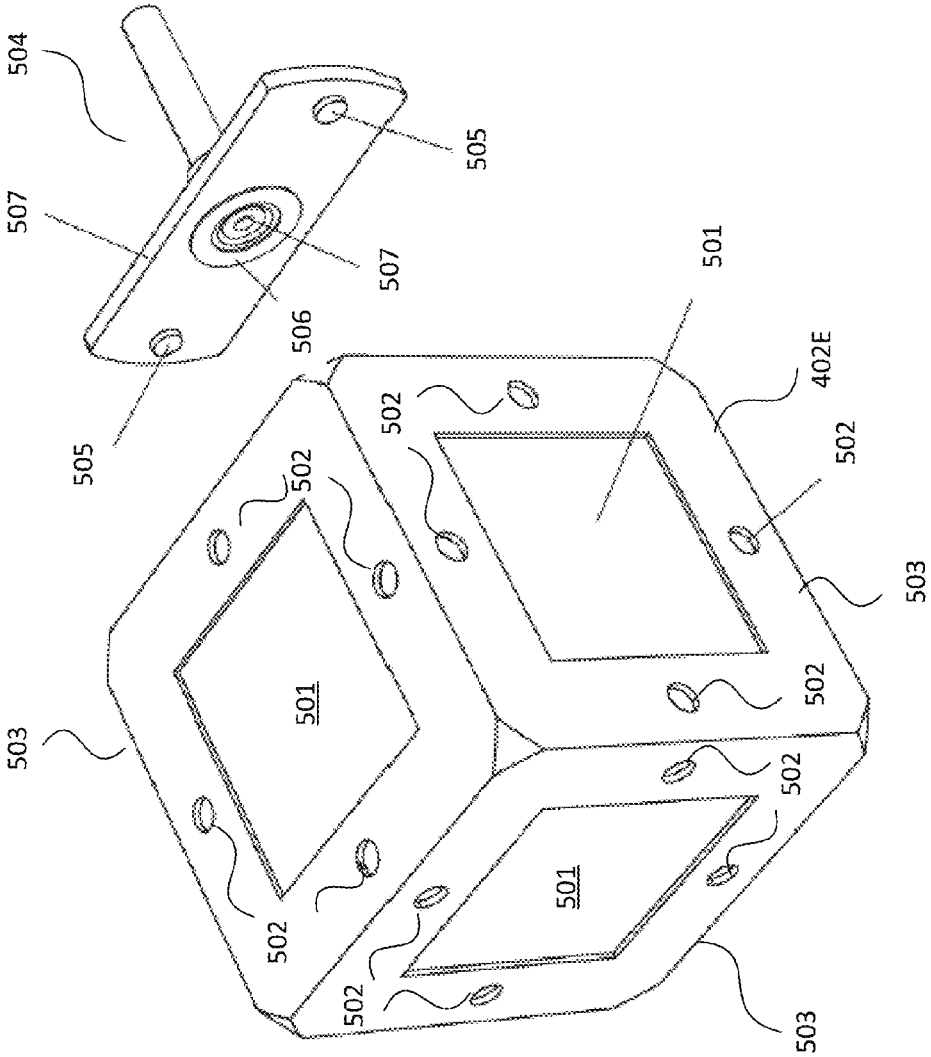
504
505
507
507
505
506
501
402E
502
502
503
502
502
501
503
502
502
501
502
503

FIG. 5

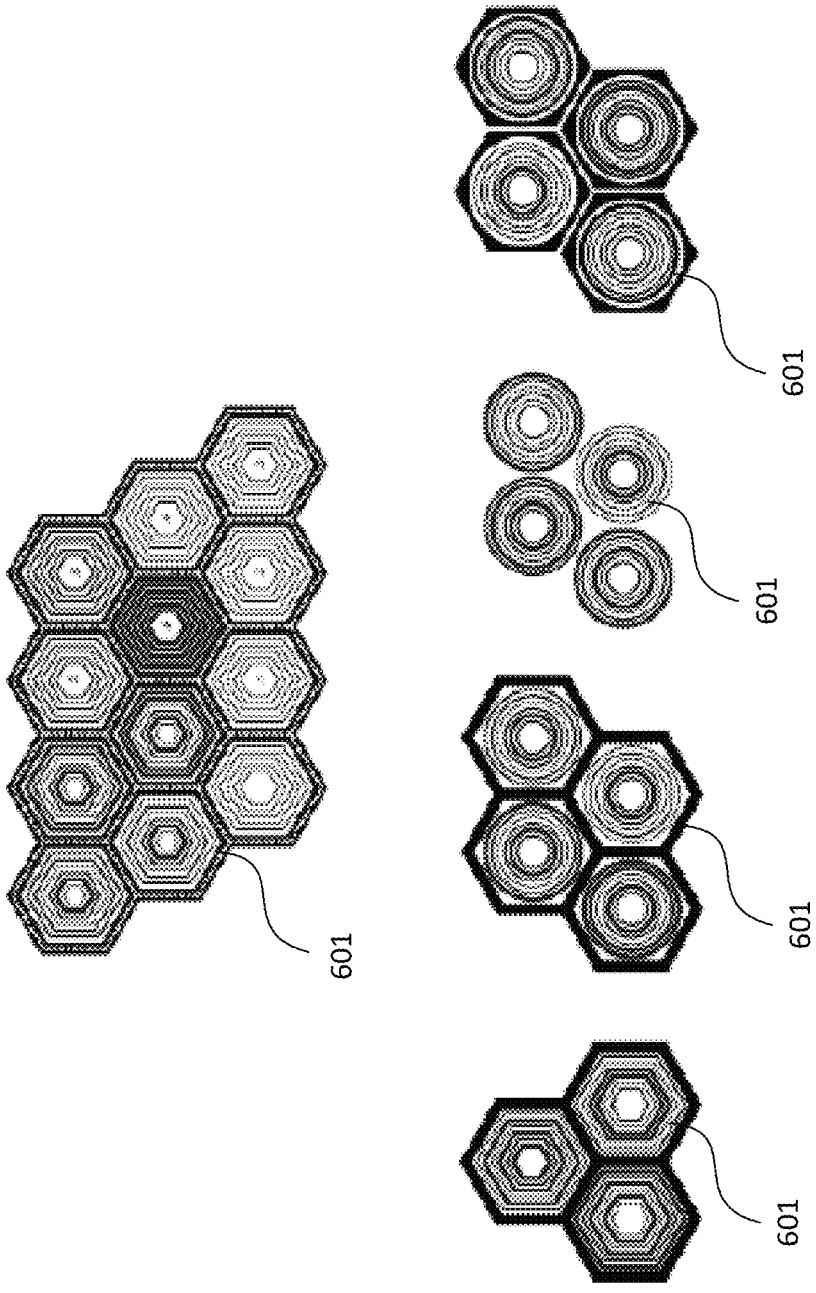

FIG. 6

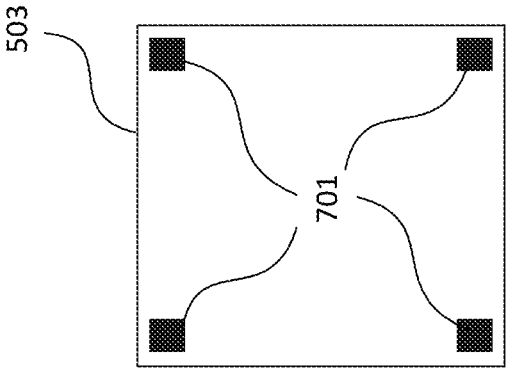

FIG. 7C

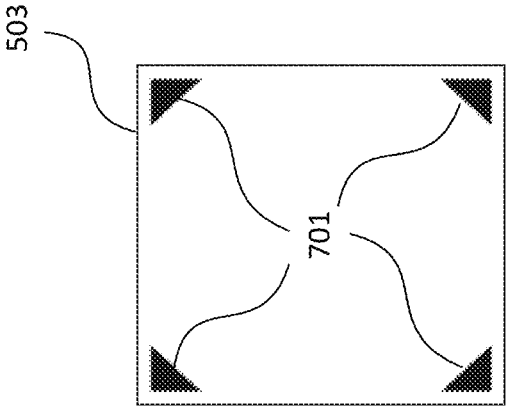

FIG. 7B

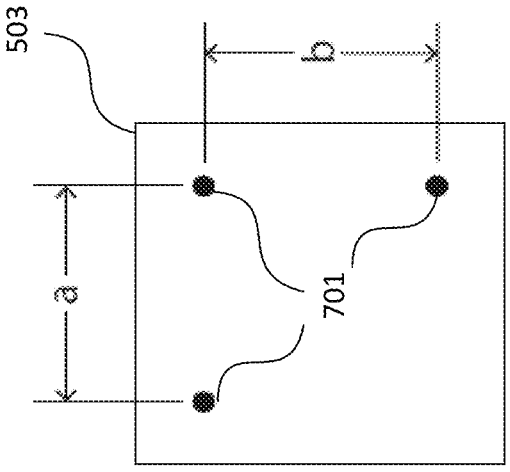

FIG. 7A

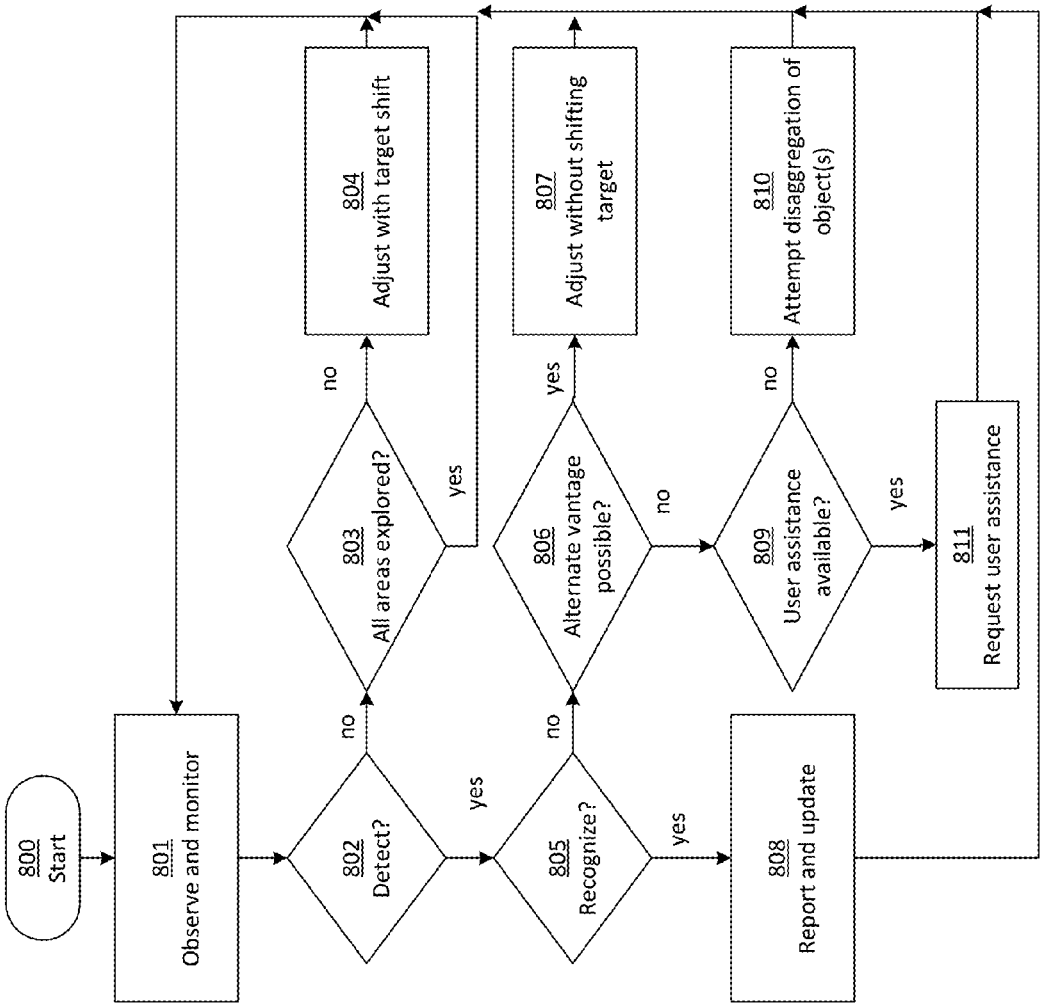
800
Start
801
Observe and monitor
802
Detect?
no
yes
803
All areas explored?
no
yes
804
Adjust with target shift
805
Recognize?
no
yes
806
Alternate vantage possible?
yes
no
807
Adjust without shifting target
808
Report and update
809
User assistance available?
no
yes
810
Attempt disaggregation of object(s)
811
Request user assistance

FIG. 8

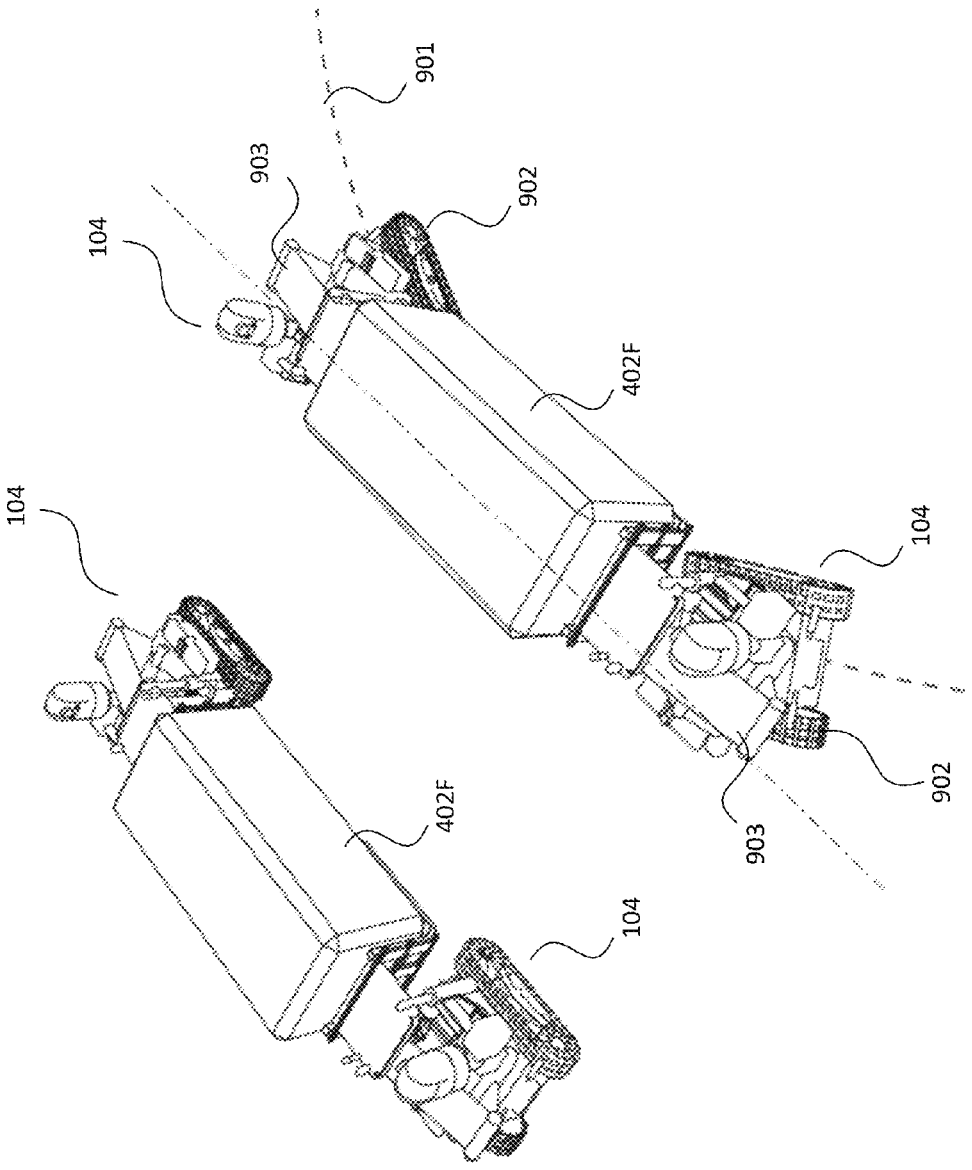

FIG. 9

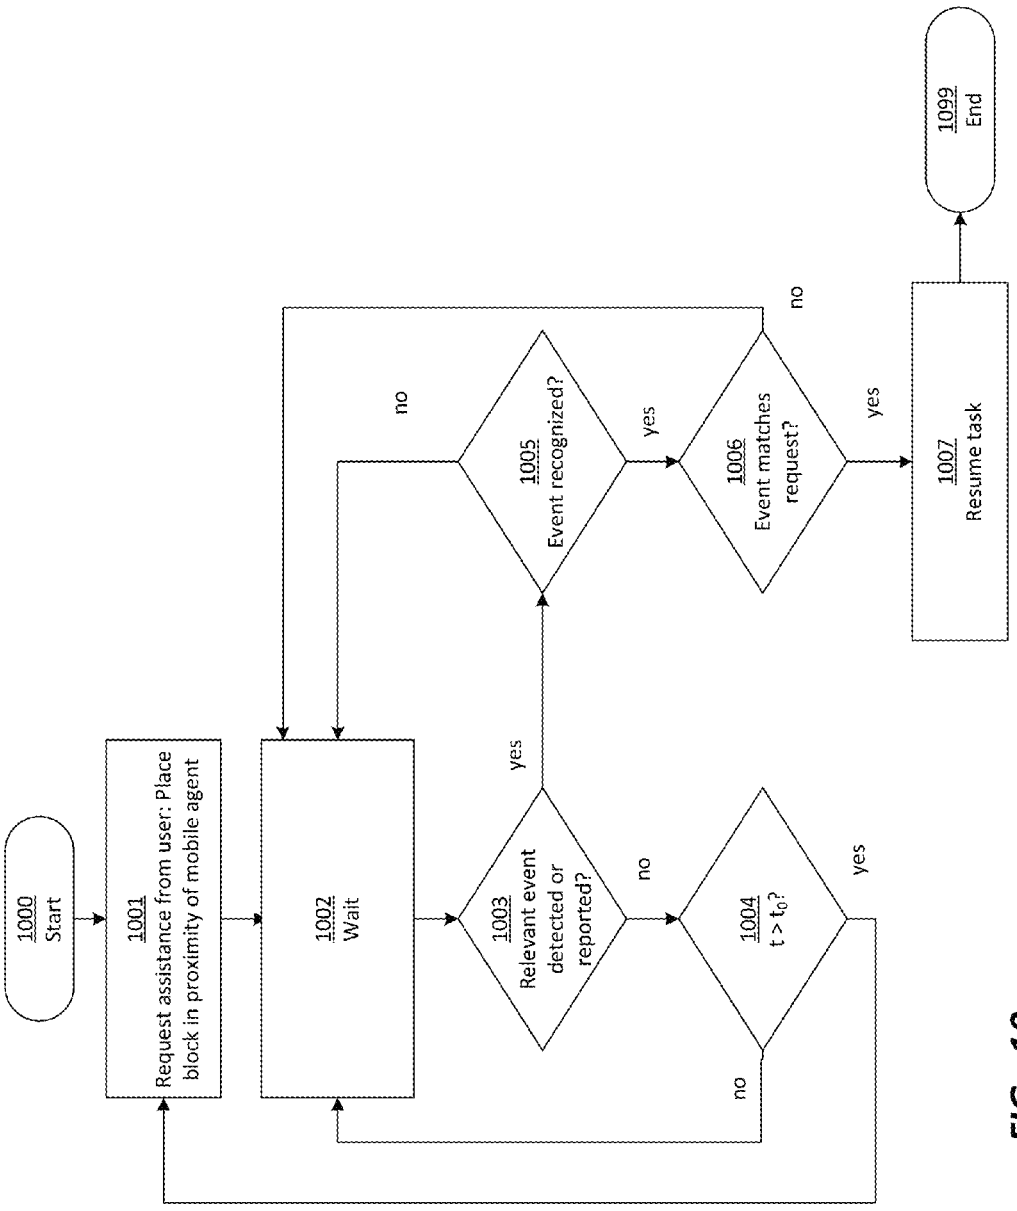
1000
Start
1001
Request assistance from user: Place block in proximity of mobile agent
1002
Wait
1003
Relevant event detected or reported?
yes
no
1004
$t > t_0$?
yes
no
1005
Event recognized?
no
yes
1006
Event matches request?
no
yes
1007
Resume task
1099
End

FIG. 10

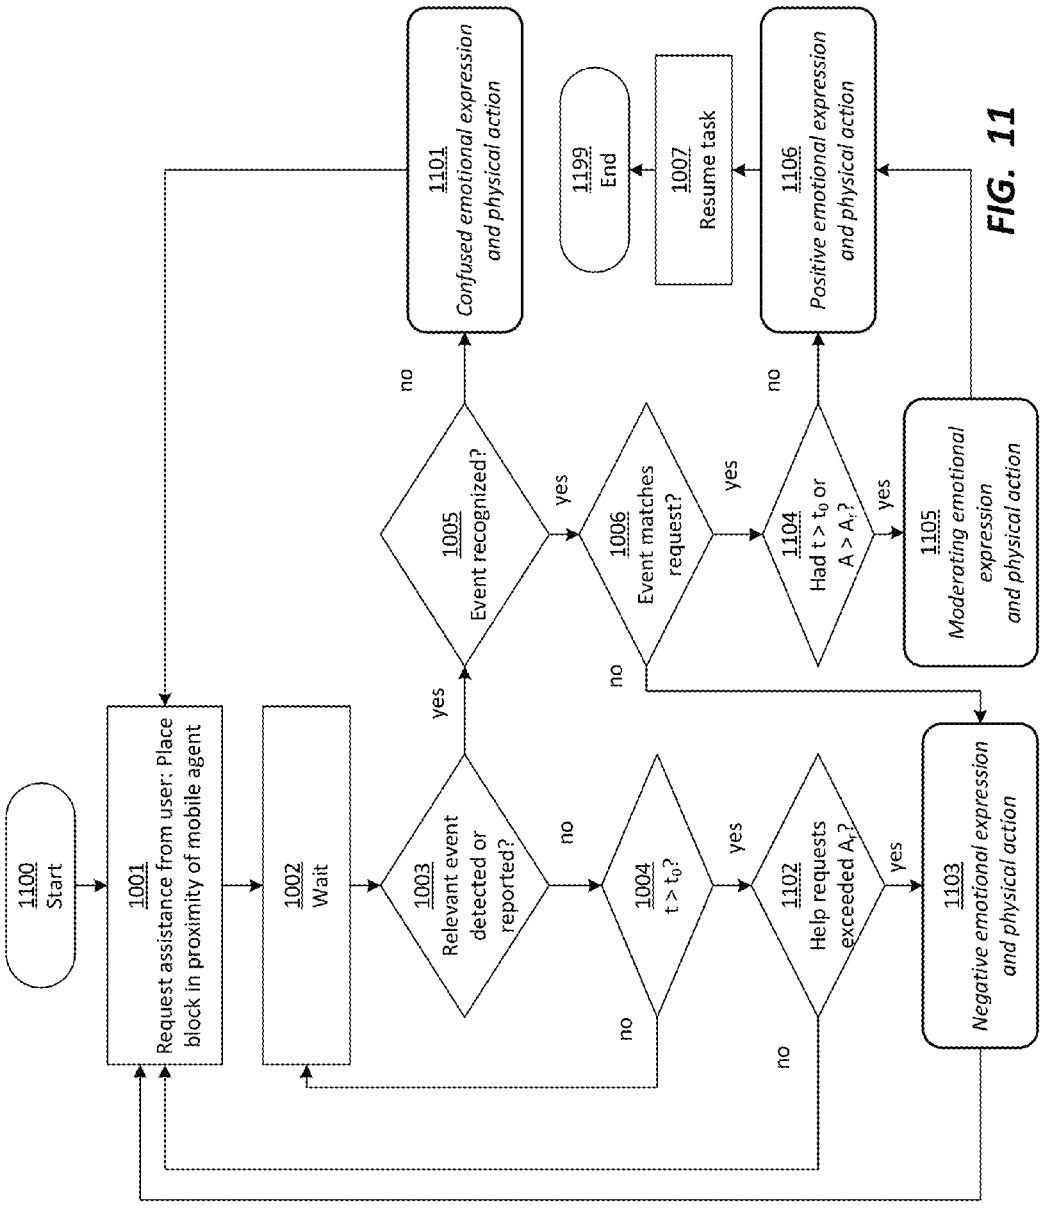
1100 Start
1001 Request assistance from user: Place block in proximity of mobile agent
1002 Wait
1003 Relevant event detected or reported?
1004 t > t0?
1102 Help requests exceeded Ar?
1103 Negative emotional expression and physical action
1005 Event recognized?
1101 Confused emotional expression and physical action
1006 Event matches request?
1007 Resume task
1199 End
1104 Had t > t0 or A > Ar?
1106 Positive emotional expression and physical action
1105 Moderating emotional expression and physical action
yes
no

FIG. 11

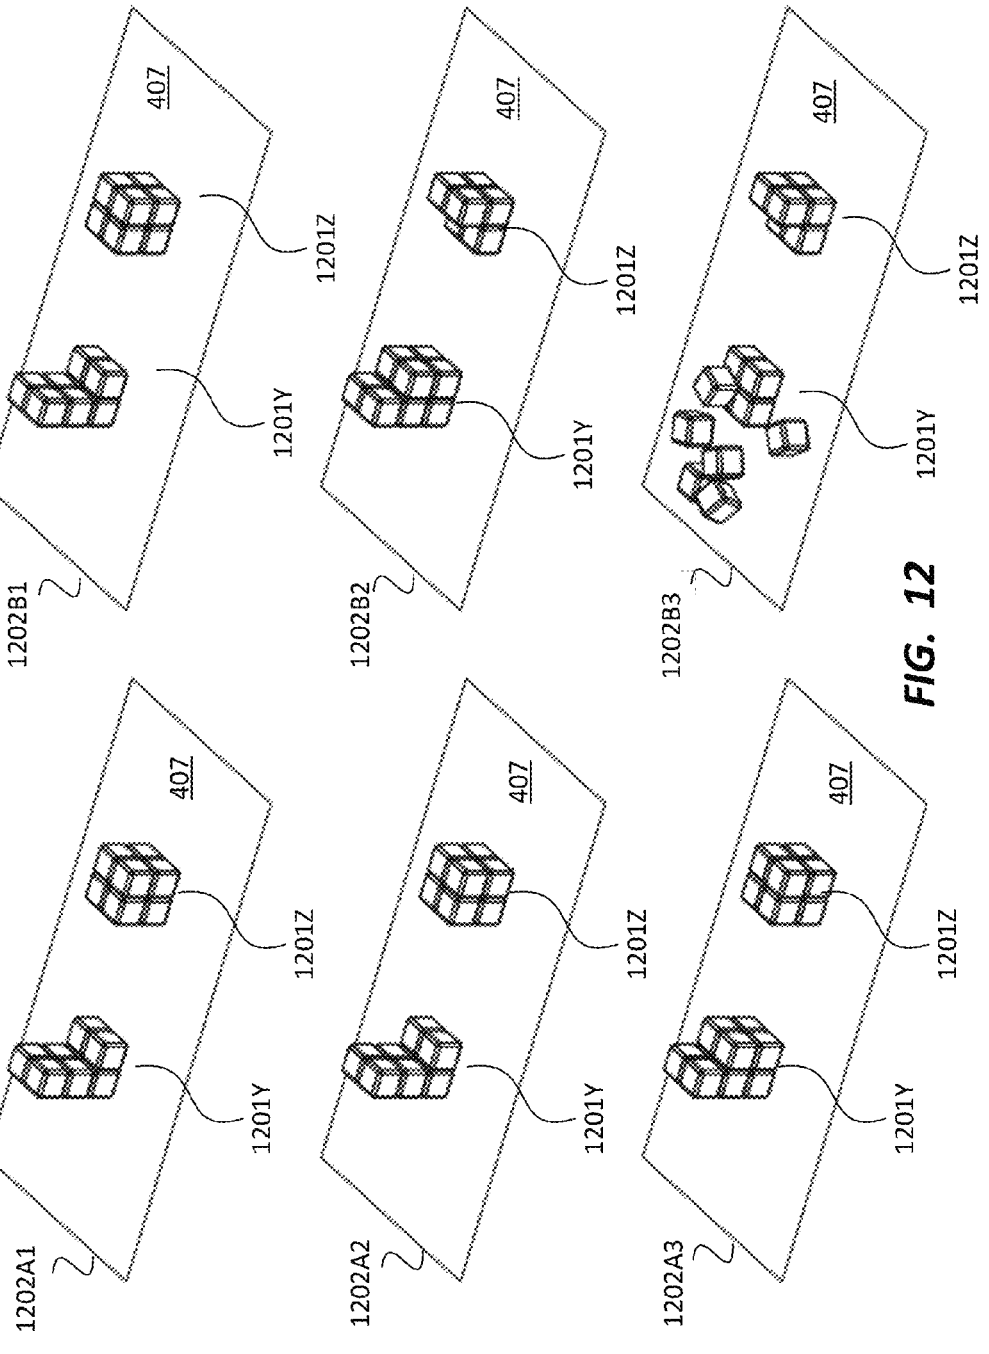

FIG. 12

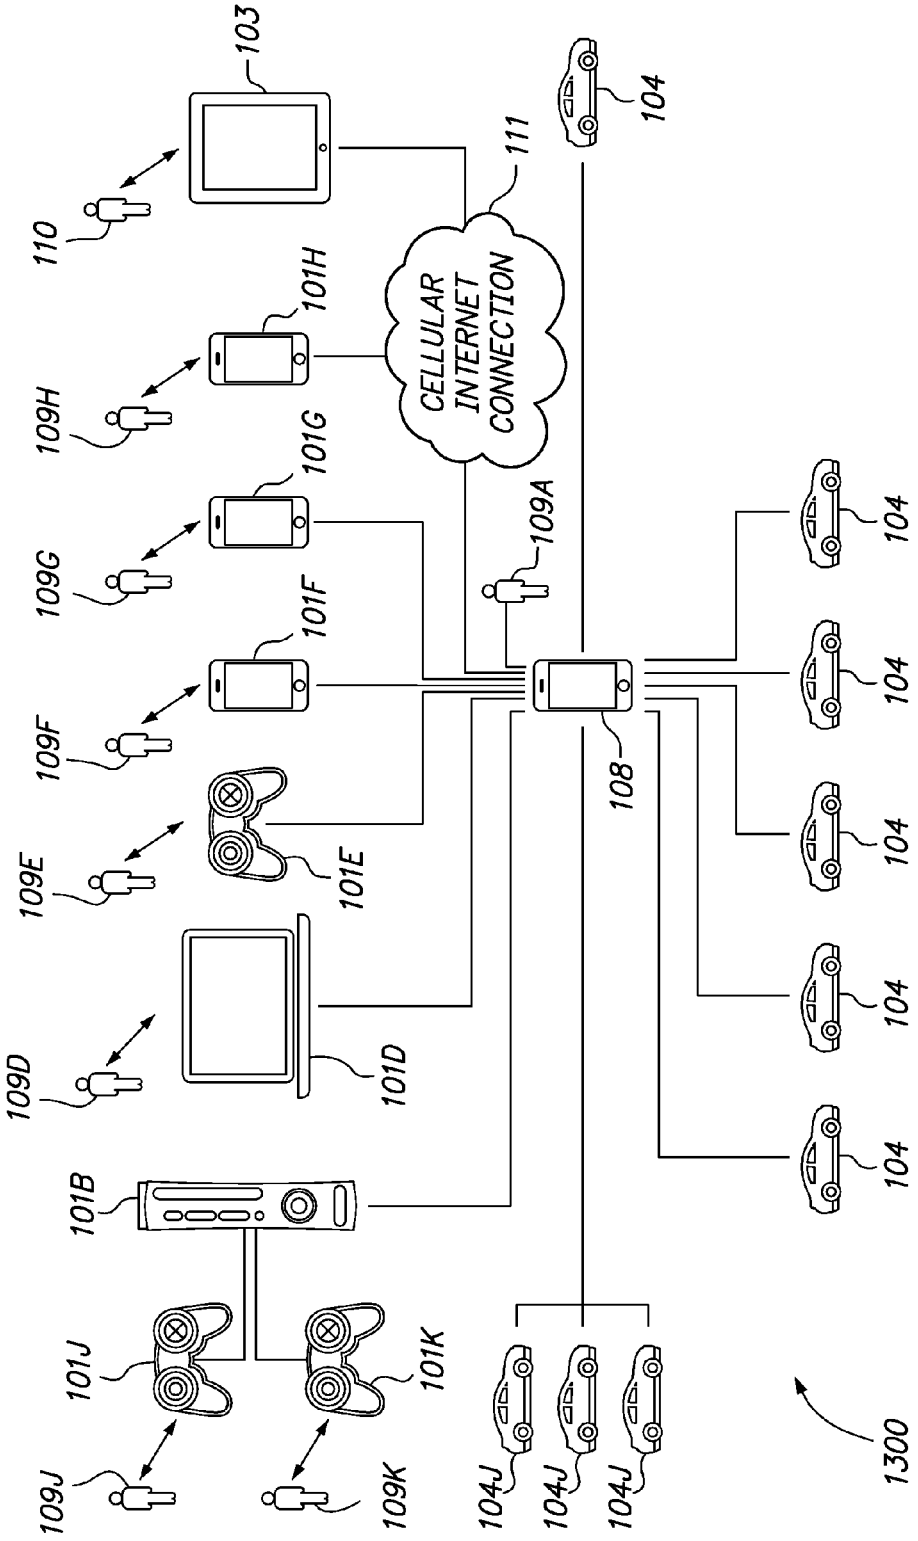
103
110
111
CELLULAR INTERNET CONNECTION
104
101H
109H
101G
109G
109A
101F
109F
109E
101E
108
104
104
104
104
104
109D
101D
101B
101J
101K
109J
109K
104J
104J
104J
1300

FIG. 13

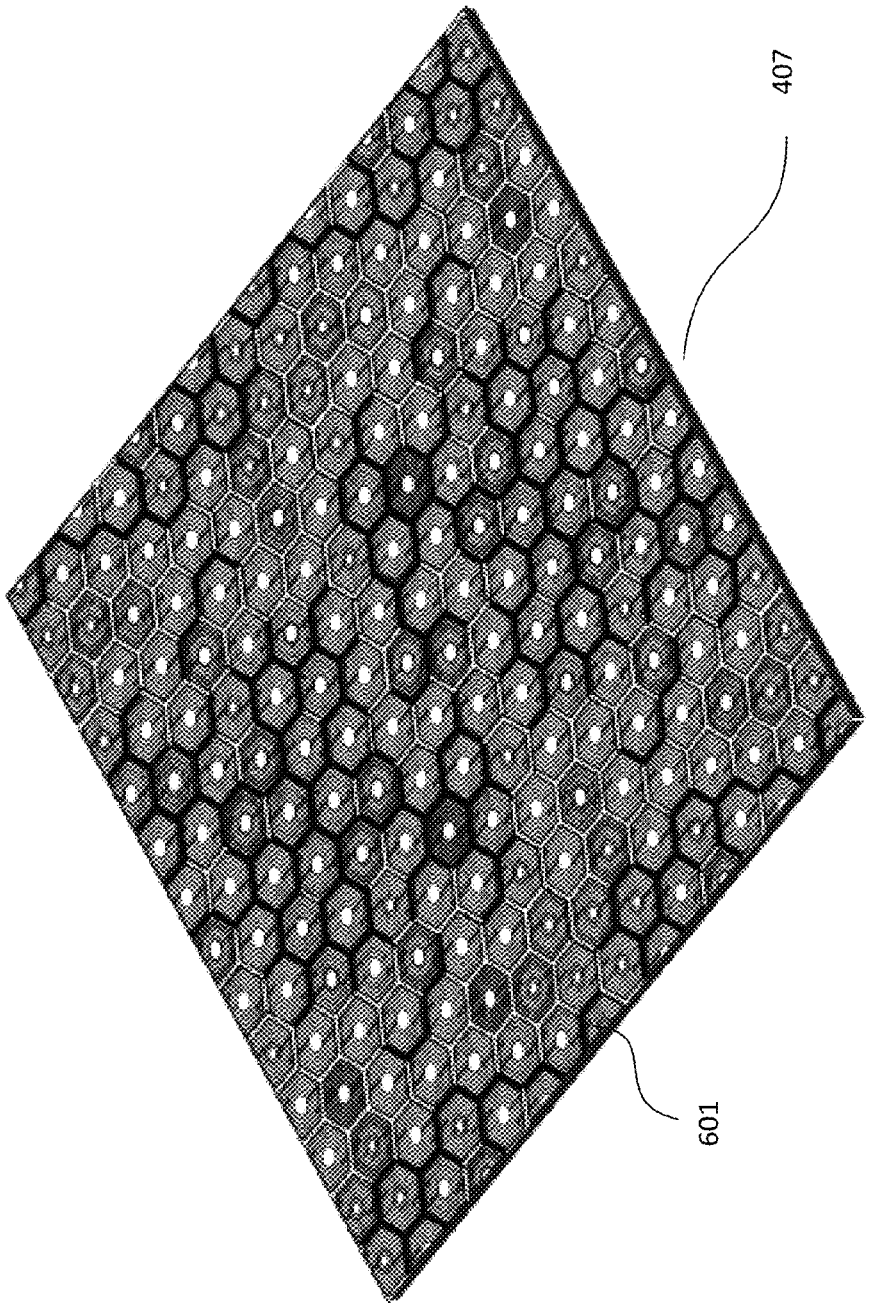

FIG. 14

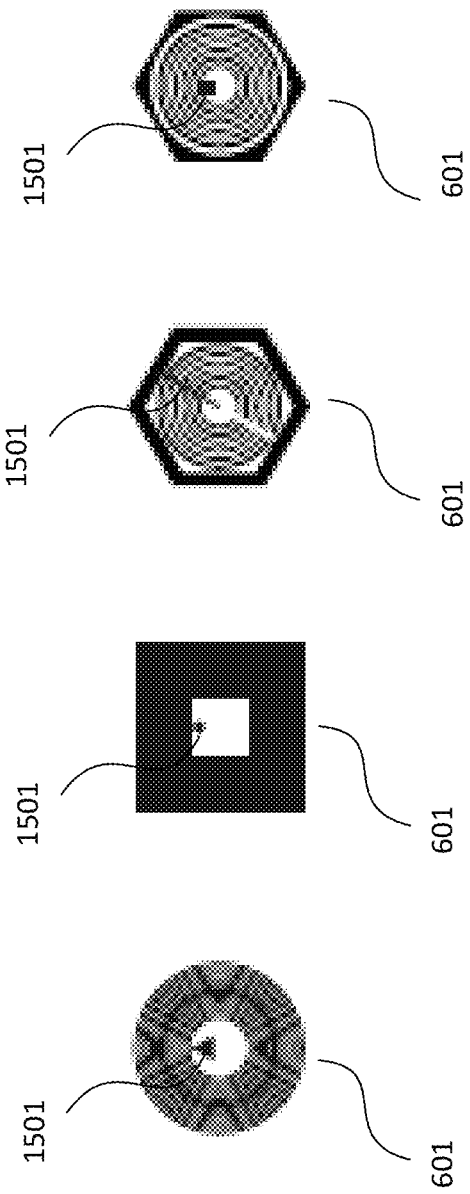

FIG. 15

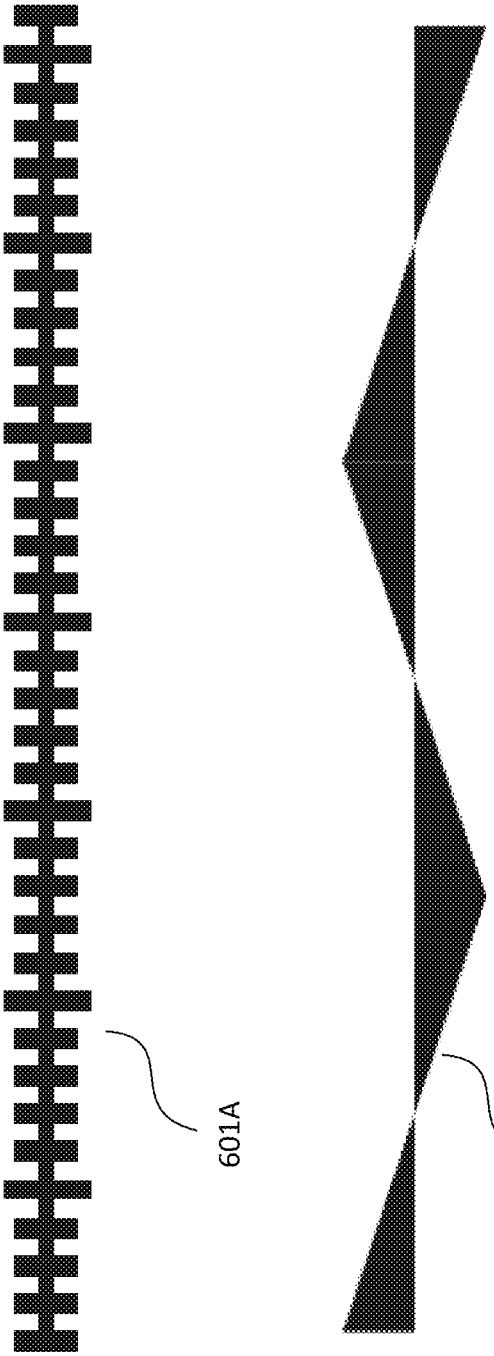

FIG. 16

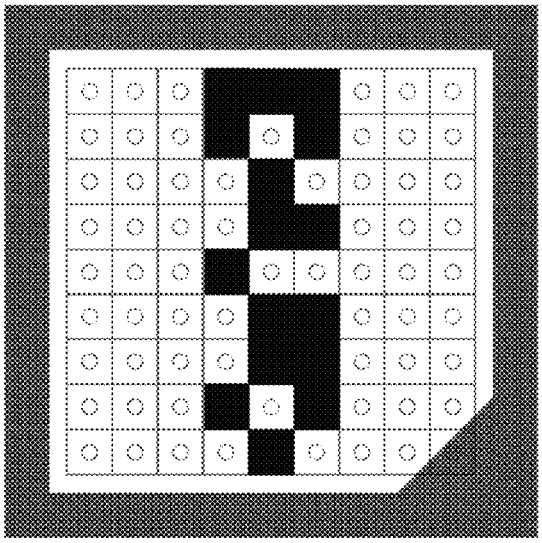

FIG. 17B

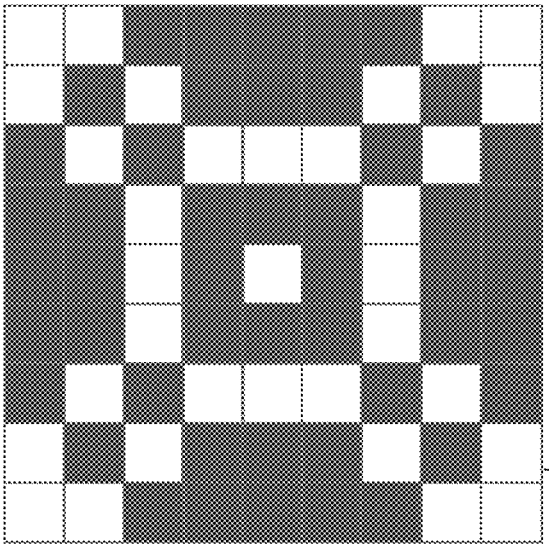

FIG. 17A

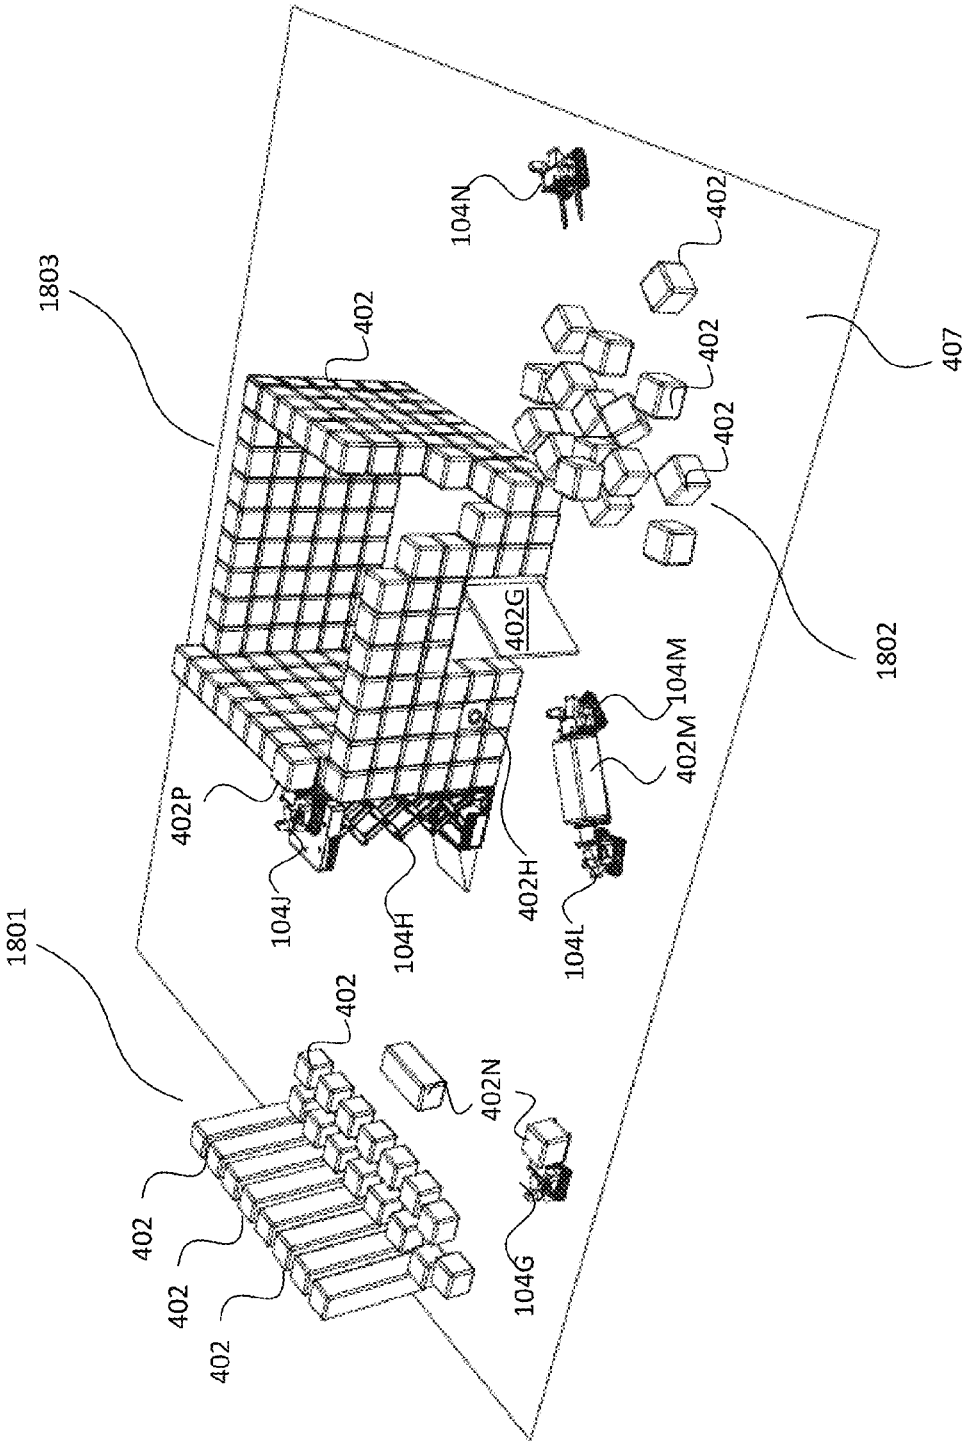
1803
402
104N
402
402
402
407
402G
1802
104M
402M
402P
104J
104H
402H
104L
1801
402
402N
402
402
402
104G

FIG. 18

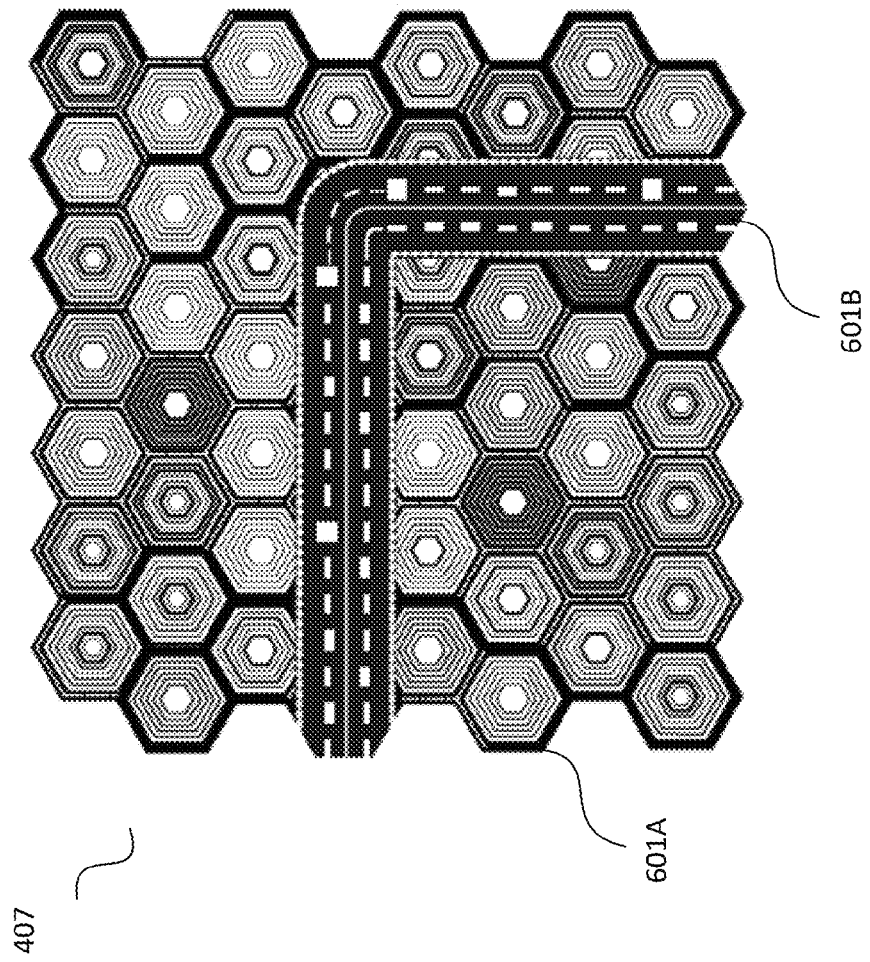

FIG. 19

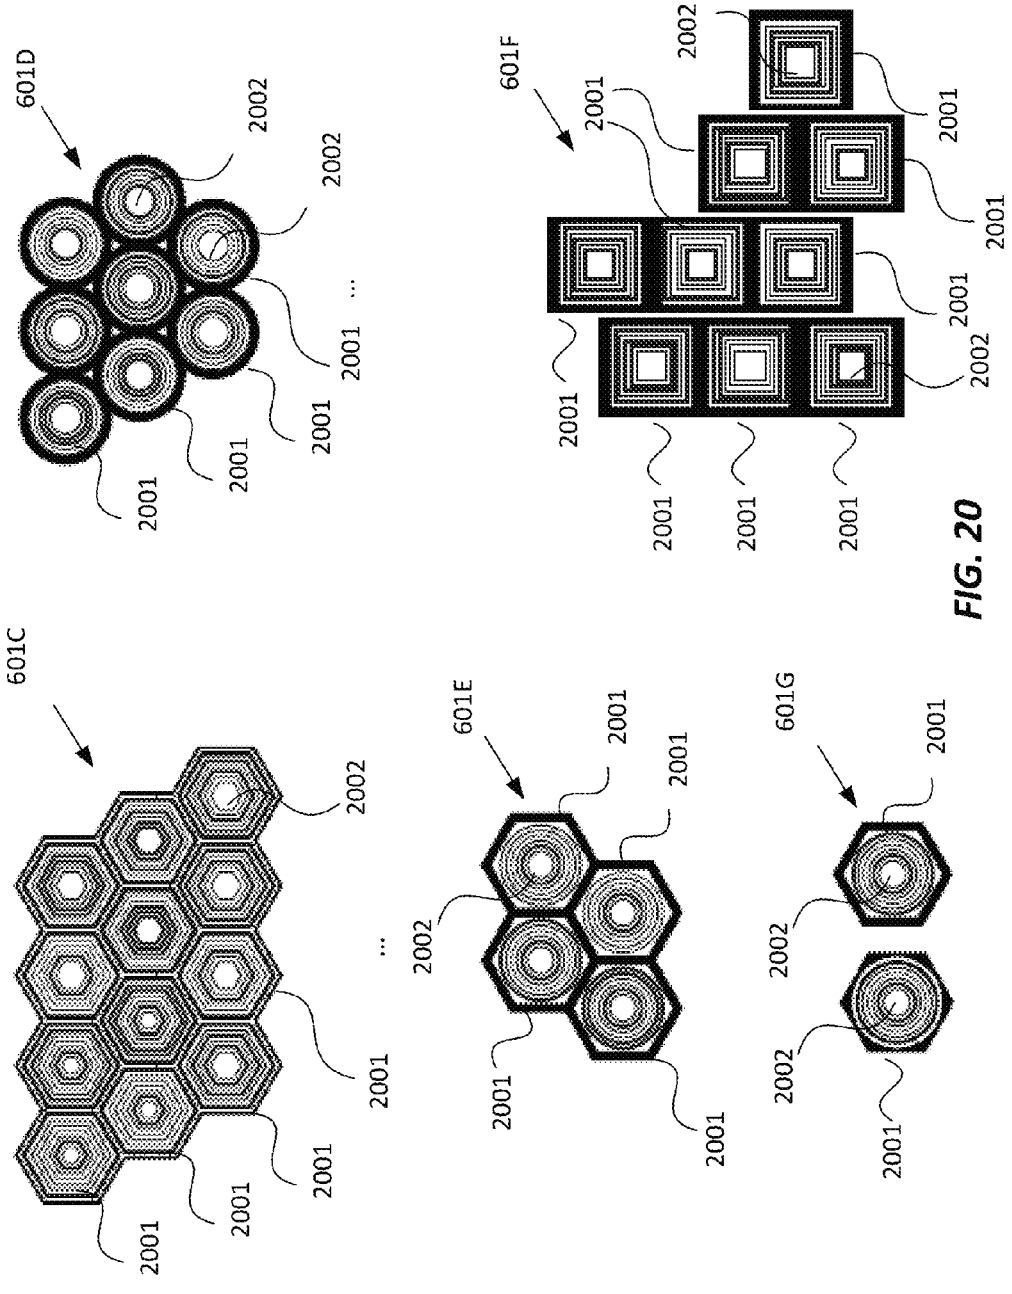
601D
2002
2002
2001
2001
2001
2001
601F
2002
2001
2001
2001
2001
2001
2001
2001
601C
2002
2001
2001
2001
2001
601E
2001
2001
2002
2001
2001
601G
2001
2002
2002
2001

FIG. 20

MOBILE AGENTS FOR MANIPULATING, MOVING, AND/OR REORIENTING COMPONENTS

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims priority from U.S. Provisional Application Ser. No. 61/829,419 for "Mobile Agents for Constructing Generalized Structures", filed on May 31, 2013, which is incorporated herein by reference.

The present application further claims priority as a continuation-in-part of U.S. Utility application Ser. No. 13/963,638 for "Integration of a Robotic System with One or More Computing Devices", filed on Aug. 9, 2013. U.S. Utility application Ser. No. 13/963,638 claims priority from U.S. Provisional Application Ser. No. 61/693,687 for "Integration of a Robotic System with One or More Mobile Computing Devices", filed on Aug. 27, 2012. U.S. Utility application Ser. No. 13/963,638 further claims priority as a continuation-in-part of U.S. Utility application Ser. No. 13/707,512 for "Distributed System of Autonomously Controlled Mobile Agents", filed on Dec. 6, 2012, which claimed priority as a continuation of U.S. Utility application Ser. No. 12/788,605 for "Distributed System of Autonomously Controlled Toy Vehicles", filed on May 27, 2010 and issued as U.S. Pat. No. 8,353,737 on Jan. 15, 2013. U.S. Utility application Ser. No. 12/788,605 claimed priority from U.S. Provisional Patent Application Nos. 61/181,719, filed on May 28, 2009, and 61/261,023, filed on Nov. 13, 2009. All of these applications are incorporated herein by reference.

TECHNICAL FIELD

The present document relates to mobile agents that are capable of constructing generalized structures.

BACKGROUND

Blocks in some form are often among the first toys a child receives; block-based games such as Jenga remain popular well into adulthood. Common to both blocks as products intended for entertainment and those used for the construction of human-scale infrastructure is the dependence on human control or manipulation of some form to execute the tasks involved in construction (or disassembly, in some cases). Put another way, block-based structures are not generally able to build or deconstruct themselves.

In addition, conventional systems and building-block toys do not provide any techniques where a plurality of mobile agents can work together and interact in a collaborative manner to complete a construction project. Nor do they have any mechanisms that provide or simulate emotional responses that affect the manner of such collaboration and interaction. Because of such limitations, the level of engagement and interest in such systems and toys is often quite limited.

SUMMARY

Various embodiments provide mechanisms for manipulating, moving, and/or reorienting components such as blocks, for example to construct generalized structures. In at least one embodiment, mobile agents (also referred to as robots) operate on a working surface that bears marks (or other machine-readable codes) which assist the mobile agents in maintaining current knowledge of their respective locations on the working surface. Mobile agents identify components by type and location in their environment and use onboard hardware to relocate or reposition components according to directions; such directions can be provided by a user, or can be based on a pre-programmed or pre-planned directive, or they can be determined dynamically based on current conditions or in response to actions of other agents. Executed by mobile agents either cooperatively or individually, these tasks can be part of a larger, organized sequence of objectives executed either sequentially or in parallel to place components (such as blocks) in arrangements. Such operations can have the goal of building a structure, and/or other goals and/or directives, or they can have no goals.

In at least one embodiment, mobile agents are responsive to changes in the environment, alterations in any works in progress, and/or other conditions. In response to such changes and conditions, such agents may be configured to exhibit responses projecting or simulating emotional reactions; for example, the agents may react in a manner that is consistent with various events, both planned and unexpected, that may occur in the process of executing their tasks. Different mobile agents can be associated with different character traits and/or temperaments, which may be static or dynamic, and which may be configured to change based on environmental conditions and/or the behavior of other mobile agents. The mobile agents can further be configured to detect environmental conditions (such as positions of blocks and other components, positions and movement of other mobile agents, temperature, terrain, goals, obstacles, behaviors of human users, and/or the like) using any suitable technique, including for example visual detection, auditory detection, proximity detection, motion detection, direct communication with a basestation and/or with other mobile agents, and/or the like, and/or any combination thereof.

By providing mobile agents with any or all of the above features, either alone or in any suitable combination, the behaviors and interactions of the various mobile agents can provide improved levels of interest and engagement with toys and systems that are implemented according to the techniques described herein.

Further details and variations are described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate several embodiments. Together with the description, they serve to explain the principles and operational mechanics of the embodiments. One skilled in the art will recognize that the particular embodiments illustrated in the drawings are merely exemplary, and are not intended to limit scope.

FIG. **1** is a block diagram depicting a mobile agent according to one embodiment.

FIG. **2** is a table depicting a set of responses and parameters that inform actions according to a generalized personality type, according to one embodiment.

FIG. **3** is a table depicting a set of emotional characteristics that can be defined in terms of points on a scale between opposing characteristics, according to one embodiment.

FIG. **4** depicts examples of features that may be characteristics of some component types according to one embodiment.

FIG. **5** depicts an example of a block component with a rectangular recess centrally located on each face and a circular recess offset from each edge, according to one embodiment.

FIG. **6** depicts examples of machine-readable codes that are presented as marks designed to be read from multiple orientations, according to various embodiments.

FIGS. **7**A through **7**C depict examples of reference marks as they may appear on a face of a cube-shaped component such as a block, according to various embodiments.

FIG. **8** is a flowchart depicting a method that mobile agents may employ on an ongoing basis to maintain parity between a virtual state and a physical state, according to one embodiment.

FIG. **9** depicts an example in which two mobile agents engage and lift a physical load each from either end and move in coordination to an intended location for their shared cargo, according to one embodiment.

FIG. **10** is a flowchart depicting a scenario in which a mobile agent requests a component from a user, according to one embodiment.

FIG. **11** is a flowchart depicting a scenario in which a mobile agent requests a component from a user, wherein the mobile agent can exhibit emotional states, according to one embodiment.

FIG. **12** depicts examples wherein a mobile agent requests a component from a user while in various states of construction, according to one embodiment.

FIG. **13** is a block diagram depicting an implementation architecture according to one embodiment.

FIG. **14** depicts an example of a working surface with machine-readable codes, according to one embodiment.

FIG. **15** depicts examples of machine-readable codes including orientation indicators, according to various embodiments.

FIG. **16** depicts examples of variable code lines, according to various embodiments.

FIGS. **17**A and **17**B depict examples of machine-readable codes, according to various embodiments.

FIG. **18** depicts an example of several mobile agents manipulating components on a working surface, according to one embodiment.

FIG. **19** depicts an example of a working surface having mixed code types, according to one embodiment.

FIG. **20** depicts additional examples of code types, according to various embodiments.

DETAILED DESCRIPTION

For illustrative purposes, the systems and methods described and depicted herein may refer to mobile agents for constructing structures in the context of a toy having, as its primary purpose, the goal of entertaining the user. However, one skilled in the art will recognize that the techniques described herein can be applied to many different contexts and environments wherein it may be useful or desired to provide mobile agents that can construct structures, display emotions, cooperate, compete, and/or perform other actions. According, the techniques described herein are intended to be applicable to any such context or environment, and are not intended to be limited to the specific implementations presented herein.

In addition, the following description sets forth many different concepts, features, and mechanisms that can be implemented singly or in various combinations. One skilled in the art will recognize that various embodiments can be implemented using one or more of such concepts, features, and mechanisms using any suitable combination.

For purposes of the following description, the term "component" is intended to apply to any of a number of different types of individual blocks and/or other elements. As described in more detail below, components can be classified as belonging to one of three types: passive, semi-active and active. In addition, the use of the term "block" or "component" should not be considered limiting, and in particular does not necessitate that the component should appear in a form consistent with the geometry or composition fitting conventional notions of a block. For example, while the working surface is unlikely to bear resemblance to a conventional block shape, in terms of role and function, it fits within the category of passive component types, as will be discussed below. In addition, as described below, mobile agents can be considered a type of component.

In terms of classification, dividing components into three component types offers convenient ordering and reference in discussing the consistencies within and distinctions among the classes; however such classifications are optional and should not be considered to limit the scope. As described in more detail below, the various classifications of components have particular characteristics and differences that may be useful to understanding their roles with respect to each to each other and within the overall system, as well as the nature of system as a whole.

Various elements of the system can be viewed in a unified framework operating within the construct of a single system. In at least one embodiment, the system can include components of various types and degrees of autonomy and functionality that can be tasked with building a structure of themselves. One or more users may participate in this activity, by providing a desired finished design, and/or by providing high level instructions for directing mobile agents capable of transporting and placing components (such as blocks), and/or by directly controlling the discrete actions of individual agents.

In various embodiments, user(s) can interact with the system and/or with individual agents using any suitable communication mechanism and/or user interface mechanism. In at least one embodiment, the system supports a robust interface between users and mobile agents via any suitable device (or more than one device) such as, for example, a tablet computer, smartphone, and/or other mobile computing device. In at least one embodiment, a touch-based screen interface or other direct-manipulation interface is supported, although any other type of user interface can be used. In alternative embodiments, other types of interface mechanisms can be supported, such as for example speech input, text-based input, mouse-based input, joystick input, and/or the like. Any such input mechanism, along with suitable output mechanism(s) and/or feedback, can be used to provide a graphical (or non-graphical) interface. The agents of the system can operate with any suitable and desired degree of autonomy and/or under any suitable and desired level of user control.

In at least one embodiment, the system includes a working surface such as a mat. The mat may bear machine-readable codes **601**, or marks, that encode locational information usable by the mobile agents to determine their positions via sensors (such as optical sensors) on the mobile agents.

Referring now to FIG. **18**, there is shown an example wherein several mobile agents **104** are in the process of manipulating various components **402** (shown as blocks) on a working surface **407**, according to one embodiment. As can be seen from the example, the various mobile agents **104** may work in cooperation with one another; alternatively, they may work separately from one another or may even interfere and/or compete with one another. Manipulation of components **402** can include construction of structures, as well as destruction or any other suitable manipulation. Components **402** can take many different forms, as discussed in more detail below, and need not be blocks.

FIG. **18** depicts several examples of interactions and behaviors of agents **104** with respect to surface **407** and components **402**, many of which are described in more detail

herein. In the example of FIG. **18**, some components **402** are kept in a block supply area **1801** from which agents **104** can take components **402** as needed for construction projects. Agent **104**G is in the process of transporting component **402**N from supply area **1801** to a building area **1803** where a construction project is ongoing. In at least one embodiment, surface **407** may contain markings or codes that define distinct zones for transit and for building, so that such an agent **104**G might use a transit corridor when transporting a component such as **402**N in this manner.

As a further example, FIG. **18** depicts agent **104**J using a scissor lift **104**H (which may itself be a tool operated by agent **104**J, or it may be an agent itself) to place component **402**P on a row that would otherwise be too high to reach. FIG. **18** further depicts an active component **402**G (active components are described in further detail below) implemented as a functional door. In this example, the door of active component **402**G can open when it receives a signal active component **402**H, which is implemented as a distance sensor that sends a signal when an object (such as an agent **104** or other component **402**) is detected within a threshold distance. Any suitable mechanism for proximity or motion detection can be used, such as for example reflected light, ultrasonic sound, Bluetooth proximity, and/or the like. In this example, agents **104**L, **104**M cooperating to carry component **402**M activate the distance sensor of component **402**H, causing component **402**H to emit a signal indicating detection of an object. Door of component **402**G responds by opening, allowing agents **104**L, **104**M to proceed into the structure.

FIG. **18** also shows agent **104**N surveying a collapse **1802** of components **402**, which may create an inconsistency between the physical environment and the virtual model of it. As described in more detail below, the system can react to such detected inconsistencies by, for example, making an adjustment to the virtual environment based on detected state of the physical environment, or by making physical adjustments (for example by moving agents **104** and/or components **402**) to cause the physical environment to comport with the virtual environment.

In at least one embodiment, mobile agents **104** may communicate with one another so as to ascertain their relative locations with respect to one another and/or with respect to surface **407**. In at least one embodiment, surface **407** is implemented as a rollable or foldable mat so as to provide for convenient storage and unpacking; alternatively, surface **407** may be rigid or may have a number of interlocking pieces.

Working surface **407** is intended to provide the area on which components **402** (such as blocks) may be manipulated and assembled. In at least one embodiment, working surface **407**, once deployed, provides a substantially flat area for assembling components **402**. However, in at least one embodiment, no special surface need be provided, and components **402** may be manipulated and assembled on a floor, table, or any other available conventional surface. In addition, in at least one embodiment, the system facilitates component functionality beyond the limits of working surface **407**. In other embodiments, component configurations can accommodate a variable surface; for example, working surface **407** can span interconnected distinct flat (and/or non-flat) areas at various elevations.

For illustrative purposes, working surface **407** is shown in FIG. **18** as a plain rectangular surface with no markings. However, in at least one embodiment, working surface **407** may include machine-readable codes and/or other markings. Referring now to FIG. **14**, there is shown an example of working surface **407** including machine-readable codes **601**. In this example, surface **407** includes a hexagonal grid; however, one skilled in the art will recognize that any other arrangement is possible, including other types of grids or no grid at all. In addition, codes **601** can take any suitable form, and need not resemble the particular codes **601** shown in FIG. **14**.

Passive Components **402**

Referring now to FIG. **4**, there are shown some examples of passive components **402**A through **402**D atop a working surface **407**, implemented as blocks and having exemplary features that may be characteristics of some component types according to at least one embodiment. FIG. **4** also depicts an example of a mobile agent **104** that is equipped with a fork-type hoist **403**.

Passive components **402** include elements that are functionally inert. One example of such components are inert blocks, which may be cubes, rectangular cuboids, or of any other suitable shape. These elements may have marks that make them useful to other elements in the system, and/or they may serve a structural role. In general, passive components are incapable of any change of state.

In various embodiments, relevant data concerning a passive component **402** can be stored and/or encoded in any suitable manner, including any form of machine-readable code affixed to, printed on, or disposed proximate to component **402**; such a code can include any or all of optically or magnetically readable marks, RFID tags, and/or the like. Referring now to FIGS. **17**A and **17**B, there are shown examples of machine-readable codes **601**, according to various embodiments; however, in other embodiments, machine-readable codes can take any suitable form. Storing and/or encoding such relevant data, using any suitable means, permits reading or decoding of such data by mobile agents **104** working with the component **402**, manipulating the component **402**, and/or operating in the environment around the component **402**. Such embodiments support the function of an external agent or other entity, while the component **402** remains a passive element. Likewise, while in some embodiments, passive components **402** can be used for building and may be placed in various positions or orientations, and/or stacked in arrangements with peer components **402** of similar or other classes, this role is a passive one and such components **402** would still be classed as passive.

Passive components **402** may resemble semi-active or active components **402** in terms of having interfacing elements that may facilitate alignment during placement and provide some degree of fixity or passive interlock (e.g., gravity fit) with adjoining components **402**; in general, however, passive components **402** lack any functional electronics or operable mechanisms (or if they do contain such elements, the elements are nonfunctional or perform operations unrelated to the operations described herein).

Component **402**B is an example of a component **402** having surface geometry. In this case, the surface geometry is configured to accommodate the forks of hoist **403** regardless of which of the component's **402**B faces is oriented downward or which edge is orthogonally presented toward the forks. Component **402**C is another example, having a raised geometric feature **404** extending from its top surface that would fit the inversion of this form on its base (thereby permitting components of this design to stack with an interlock). Component **402**D is yet another example, having a raised geometric feature **405** similar to feature **404** of component **402**C, with the addition of slotted openings **406** at the base of geometric feature **405**, facilitating lifting of the component **402** from the top.

In terms of performance within the preferred embodiment, working surface **407** can also be considered a passive com-

ponent **402**. Working surface **407** can include marks, machine-readable codes, RFID tags, and/or any other suitable elements that facilitate navigation of mobile agents **104** and placement of components **402** on surface **407**.

Semi-Active Components

Semi-active components **402** include a range of potential component types. For purposes of the description herein, a semi-active component **402** may have similar basic properties as passive components **402**, but may also possess functionality that may be controlled by users and/or mobile agents **104**. For example, a semi-active component **402** may be capable of undergoing a mechanical or other state change. An example of such a component **402** is one that has a mechanical system that permits interlocking with another component **402**. In such a scenario, a mobile agent **104** can be configured with a manipulator disposed to operating the semi-active component **402**. For example, a rotatable extension rod can plug into a socket on the component **402**; by turning the socket, the mobile agent **104** can engage interlock pieces that latch to a surface feature on one or more neighboring components **402**. A similar result can be achieved with magnets providing the bonding force between components **402**; in this case, mobile agents **104** tasked with manipulating components **402** can employ a magnetic coil with a ferrite core at the end of a manipulator alternatively to permit a magnet contained in the component **402** to attach to the arm or to release said magnet by sending current through the coil. Other configurations are possible, wherein one or more semi-active components **402** contain(s) one or more element(s) that are capable of a state change.

Referring now to FIG. **5**, there is shown an example of a block component **402**E having a rectangular or square recess **501** centrally located on each face **503** and a circular recess **502** offset from each edge. A ferrous panel (not shown) can be fixed within each recess **501** such that any identifying marks or features potentially present on the face of the recess **501** would be less prone to scratching or abrasion with neighboring surfaces were it mounted flush.

FIG. **5** also depicts manipulation tool, or manipulator **504**, presumably mounted or otherwise controlled by a mobile agent (not shown) tasked with positioning components such as block component **402**E. In this case, manipulator **504** bears protrusions **505** of the corresponding size and spacing to mate with circular recesses **502** on face **503** of component **402**E. At the center of manipulator **504** is a ring element **506** that may be a permanent magnet or a ferrous material that is configured to operate as an electromagnet, set proud of its mounting surface **507** to assure contact with recess **501** of component **402**E. When manipulator **504** is applied to component **402**E, the attractive force created through magnetic attraction between ring element **506** and recess **501** panel creates a degree of fixity between the two, and thereby enables a mobile agent controlling manipulator **504** to move, lift, or otherwise manipulate component **402**E. The mating geometries between recesses **502** and protrusions **505** provide an assurance of consistency and predictability on the position and orientation of component **402**E relative to manipulator **504** when interlocked with one another. One skilled in the art will appreciate the importance of maintaining precision in moving and placing a component **402** such as component **402**E in space relies on an awareness of the component's **402** relative position with respect to a known position such as that of manipulator **504**. However, other techniques can be used for assuring such precision.

It can also be appreciated that depending on factors such as component size, mating feature geometries and position and the limitations on a working knowledge of the position of manipulator **504** and associated motion control, successfully applying manipulator **504** to a face **503** of component **402**E in a way that will assure interlock of the mating features can become difficult. Any of a number of techniques can be used to facilitate the positioning of manipulator **504** with respect to component **402**E. For example, in at least one embodiment, a camera **507** or similar imaging device may be co-located with the central axis of manipulator **504**. In such an embodiment, any suitable mark(s) (not shown) on or near recessed areas **501** of component **402**E may be configured in a way to enable convenient identification of a center point or some other known point, such that aligning manipulator **504** along a vector normal to the center of the panel with a rotational orientation matching that of the panel would assure that the mating features would interlock as intended. Once component **402**E is engaged and its position or orientation is altered as intended, the magnetic force sustaining adherence between manipulator **504** and component **402**E can be broken either by halting the electric current powering an electromagnet holding the two bodies together or by applying an electric current to an electromagnet in an arrangement where such a magnet would negate the force of a permanent magnet that might be securing component **402**E to manipulator **504**.

Locally negating the natural attraction of magnets in a similar fashion is also a means by which a mobile agent can separate components **402** bound by magnetic forces.

One skilled in the art will recognize that the magnetic coupling described above is merely one example by which a mobile agent can manipulate components **402** such as component **402**E. As described, state changes in semi-active components **402** such as component **402**E can facilitate such manipulation. However such state changes are executed, the operable interlock between manipulator **504** and component **402**E can be one that the mobile agent has the capacity to engage and manipulate.

In at least one embodiment, a mobile agent uses components **402** such as component **402**E to build an assembly of components **402** that benefit from being mechanically joined to one another. A potential advantage to mechanical or other means of components **402** to attach to each other lies in improving the strength or stability of structures that the mobile agents might build, whether these are assemblies of similar components **402**, such as a conventional wall, or dissimilar component types, such as a block latching to a steeple block mounted atop it.

In the described example, the mechanism may or may not rely on an external operator to provide the energy to change the state of the latching mechanism (e.g., unlocked or locked). In at least one embodiment, a semi-active component **402** (such as component **402**E) may have its own internal power supply (not shown) to support its functional operation.

One skilled in the art will recognize that many other types of semi-active components **402** can be used. Other examples of semi-active components **402** may be those equipped with LEDs for illumination or status reporting, components **402** with integrated doorways or components **402** containing LCD displays, any of which may change state based on a potentially wide range of means such as a mechanical switch on the component's **402** surface changing position or the reception of a wireless signal providing the directive. Semi-active components **402** may also assume forms that may not resemble structural elements (blocks) per se and may not serve such a role as their primary function. Examples of semi-active components **402** of this sort include components **402** that facilitate or better enable mobile agents in executing their tasks. One example is a wheeled chassis mounted with a scissor lift capable of raising a platform from a low height off

the floor to a higher elevation. Such a component **402**, while likely differing substantially from a typical structural block form, can be designed to permit operation by a mobile agent **104** either to move it into a position at which an elevating platform would aid in building taller structures or raising and lowering said platform. In this fashion, semi-active components **402** of this nature may fulfill the functional role of tools (in this case, as a sort of construction equipment).

The example of the wheeled platform as a semi-active component **402** illustrates what might be common traits of this component type. One can appreciate that the component **402** might be designed for operation by a single mobile agent **104** or multiple mobile agents **104** acting in cooperation (e.g., one mobile agent **104** moving the wheeled platform to locations where passive components **402** are to be placed while another mobile agent **104** is positioned on the platform to place components **402** in the designated positions). Alternatively, the platform may also be equipped with hardware similar to that of a mobile agent to grip and manipulate components **402**. In this fashion, the semi-active component **402** in this example serves to extend the manipulation and placement capability of a mobile agent **104**.

Active Components **402**

Active components **402** are primarily distinguished by their ability to act autonomously or otherwise perform functions without direct mechanical or electrical input or directive from a mobile agent **104**. This category of components **402** presents the broadest types of functionality as well as the most versatility and autonomy. They may otherwise resemble semi-active components **402** in terms of functionality, but are able to act an appreciable degree of independence. These components **402** may contain, for example, sensors that trigger processes leading to action, and/or they may follow a programmed routine.

Any number of specialized components **402** may fit into this category. Some of these components **402** may have the same outward geometry as passive or semi-active components **402**, permitting them to stack within structures built of passive and/or semi-active components **402**, for example. However, active components **402** may also serve an additional function beyond physical support. One example is a component **402** equipped with a sensor on its face to detect motion in its vicinity. Such a component **402** can be programmed, for example, to send a wireless signal to another active component **402** that contains a battery-powered motorized door. When the second component **402** receives the signal from the first, it actuates the door mechanism, permitting passage through the component **402**.

In another example, an active component **402** may employ a timing scheme similar to a streetlight and control the flow of traffic by raising and lowering a drawbridge. Combining functional hardware, a means of communication and perhaps some degree of programmability (if the component **402** is not controlled directly by an independent host device), a broad array of possibilities exist for the roles of active components **402** in creating an interactive building environment. Active components **402** can thus be variously equipped with any suitable elements such as, for example, sound devices, digital display screens, lights and/or mechanisms that directly respond to and/or affect the activities of mobile agents **104** operating on working surface **407**, and/or any combination thereof. In the same manner that the description of semi-active components **402** included tools or operable components **402** that did not serve a structural role, mobile agents **104** themselves, both functional and acting with a high degree of autonomy, may be considered a type of active component **402**. For purposes of clarity, the following description involving mobile agents **104** will continue to refer to them as such, although such agents **104** can also be considered to be a type of active component **402** in the context described herein. Thus, in the example of FIG. **18**, components **402** are likely passive and/or semi-active, but agents **104** can be considered a type of active component **402**.

One particular type of active component **402** is a mobile agent **104** having some level of autonomous mobility. Mobile agents **104** can operate entirely autonomously, and/or they can be controlled by a user via some central control unit or individually. Alternatively, mobile agents **104** can operate as directed by autonomous control mechanisms in a central control unit. In at least one embodiment, mobile agents **104** and other active components **402** can function to attempt to achieve high-level goals that can be specified by a user or control unit, while functioning autonomously at a low level to achieve such goals.

Referring now to FIG. **1**, there is shown a block diagram depicting a conceptual architecture of a mobile agent **104** according to one embodiment, including power, sensing, processing, and communication elements, as well as actuators and (optionally) output device(s). One skilled in the art will recognize that the various elements shown in FIG. **1** as being included in mobile agent **104** are merely exemplary, and that some of the elements may be optional. In addition, in alternative embodiments, other elements not shown in FIG. **1** can be included in mobile agent **104**. In addition, different types of mobile agents **104** having different configurations of elements can be included.

Power element **102** provides power to mobile agent **104**. Power may be provided from any suitable source, such as for example a battery, solar cell, and/or the like.

Sensing element(s) **103** (or sensors) can include any suitable element or combination of elements, such as for example optical, acceleration, gyroscopic, acoustic, encoding assemblies (e.g., magnetic wheel encoders), and/or pressure/force and distance sensors (e.g., infrared or ultrasonic based). According to various embodiments, sensors **103** may assist mobile agent **104** in a variety of functions such as determining and monitoring position (localization), identifying other components **402**, manipulating components **402**, and the like. Sensors **103** can be used in performing any activities involved in a mobile agent's **104** execution of its available tasks. In addition, in some embodiments, some sensors **103** may be directed toward monitoring an agent's **104** internal states such as wheel encoders providing information regarding rates of rotation or a specific rotational angle as it relates to position. Outward-directed sensors **103** can include sophisticated components such as 2D imagers as well as simpler ones such as ultrasonic distance sensors. In at least one embodiment, outward-directed sensors **103** can serve to monitor the state of a mobile agent's **104** surroundings and can detect changes within it, including information related to the agent's **104** manipulation or transport of other components **402**.

Agent **104** can also include any suitable type of onboard processor(s) **105**, such as, for example, a microcontroller and any associated memory modules, and/or any other suitable elements.

Agent **104** can also include any suitable type of communication module(s) **107**, which can be implemented according to any known technologies and can rely on any suitable standards. Examples include any suitable wired and/or wireless technologies such as Bluetooth, Wi-Fi, and/or those using radio frequency or infrared light, and/or the like. Communication module(s) **107** can communicate via any available communications network.

Agent **104** can also include any suitable type of actuator(s) **106**, which can operate to affect change directly (or indirectly) to aspects of the mobile agent **104** and/or its surroundings. Such changes can include, for example, moving or re-orienting agent **104**, and/or interacting with components and/or other agents **104** (for example, to pick up and move blocks or other components). Actuators **106** can include elements that effect change in a mechanical sense, such as a propulsion mechanism, motors, voice coils, arms, and the like.

Agent **104** can also include output device(s) **107**, although such devices are optional. Such output device(s) **107** can include any elements suited for providing output perceivable by users; examples include speakers, LEDs, and/or LCD displays. Output can be visual, auditory, haptic, and/or any combination thereof. In at least one embodiment, output device(s) **107** can generate output that can be signal other agents **104** (or give the appearance of signaling other agents **104**) via their sensor(s) **103**; for example, one agent **104** may respond to output generated by another agent **104**. Such output generated by an agent **104** may or may not be perceivable by humans even if it is perceivable by other agents **104**. Output device(s) **107**, when included, may be considered a type of actuator **106**.

Examples of output generated by device(s) **112** include notification to user that mobile agent **104** has a request requiring fulfillment; an indication of emotional response; feedback; detailed articulation of a request (either as an alternative to doing so through a dedicated user interface on a device or as a supplement to it); and/or the like.

In at least one embodiment, a mobile agent **104** may contain multiple copies of some or all elements identified in FIG. **1**. Conversely, it is not necessary for a mobile agent **104** to contain all elements identified in FIG. **1**. Because mobile agents **104** may assume a variety of forms, hardware configurations may vary according to an agent's **104** particular functional capabilities.

In at least one embodiment, mobile agents **104** recognize and maintain data regarding their location and orientation relative to the working environment. In at least one embodiment, the working surface **407** on which agents **104** operate provides a plane which may be enhanced to support agent localization. It is not necessary for the operating surface to be flat; rather, in at least one embodiment it may have curvatures, discontinuities, and/or other irregularities.

Localization

In at least one embodiment, mobile agents **104** have a working knowledge of their current position and orientation in space, so as to enable and support optimal execution of tasks involving motion or mobility, as well as to cooperate, compete, and otherwise interact with one another. Higher level processes such as path planning, object manipulation and coordination of effort among multiple agents **104** are implemented by providing persistent monitoring of the position and orientation or individual agents **104**. Agents **104** can be made aware of locations of other agents **104**, so as to facilitate various types of interaction among agents **104**.

In at least one embodiment, the system maintains a virtual model of the positions of agents **104** within the environment. Such a virtual model can be stored centrally, and/or in distributed fashion, and can be made available to individual agents **104** so that they may be made aware of their relative positions with respect to other agents **104** and with respect to working surface **407**, components **402**, and/or other environmental elements. In at least one embodiment, the system and method maintain parity between actual physical locations of agents **104** within the physical environment and the corresponding locations of virtual representations of such agents **104** in the virtual environment. As described in related U.S. Utility application Ser. No. 13/963,638 for "Integration of a Robotic System with One or More Computing Devices", filed on Aug. 9, 2013, maintaining parity can include detecting physical and virtual locations, and adjusting one or the other accordingly. Priority can be given to the physical environment, in which case the virtual positions are adjusted based on detection of physical positions. Alternatively, priority can be given to the virtual environment, in which case agents **104** are instructed to move themselves and/or components **402** so as to comport with positions of corresponding elements in the virtual environment.

Maintaining parity between the virtual and physical environments can be beneficial for several reasons. In at least one embodiment, agents **104** plan actions and respond to events based on the virtual representation of the environment; therefore, differences between the physical environment and the virtual model of it can complicate successful execution of actions. Thus, maintaining parity can help agents **104** to more accurately perform their planned actions, by helping to detect inconsistencies and to remedy them.

In addition, unintended events or those external to a planned course of activity can disrupt one or more agents **104** engaged in a task. For example, if a structure of blocks collapses, whether by deliberate sabotage by a human onlooker or for some other reason, the system, in at least one embodiment, provides a mechanism by which agents **104** can recognize that the physical environment has diverged substantially from the virtual model of it. Agents **104** may further recognize that such divergence may preclude continuing with a current set of actions that were planned around a state of the virtual model that may be partly or completely irrelevant.

Accordingly, in at least one embodiment, the system maintains parity between the virtual and physical environments by obtaining information such as the location, position and/or orientation of agents **104** and components **402** as determined through available means of detection, comparing such information with the corresponding space in the virtual model, and adjusting the physical and/or virtual environments accordingly. In at least one embodiment, it is most desirable to minimize any differences that may emerge between the physical environment and the virtual representation of it, with respect to both the magnitude of any difference and the duration during which it exists. One can appreciate, however, that in other embodiments, particularly those in which elements of personality affect the operation of agents **104** as described herein, delays between the time at which parity is lost between the physical and virtual and the time at which an agent **104** adjusts its actions in response may provide reinforcement to the personality traits intended to be demonstrated by an agent **104** or to the overall impression of cognizance exhibited by an agent **104**. For example, if an agent has a personality profile intended dispose its actions to resemble conventional notions of low awareness, a longer lag time can be introduced between the time at which an event that creates a substantial difference between the physical environment and virtual model occurs and the agent's **104** response to such an event. In this regard, while processes that seek to maintain parity between the physical and virtual may detect a difference, algorithms related to presenting an agent **104** with elements of personality may artificially delay an agent in its identification of the difference and its response to it. As discussed herein, such lag time can also provide a source of entertainment to human observers.

Unplanned events that result in divergence between the physical environment and the virtual representation, such as the aforementioned example of a physical structure's col-

lapse, can also serve as triggers for one or more actions associated with an emotional response that might be part of an agent's **104** personality profile. For example, as a setback to building progress, a structure falling apart would likely be a demoralizing or frustrating event for a human participant in a construction undertaking. Accordingly, in the context of the present system, an agent **104** might project indicators of frustration such as, for example, an agent **104** driving in circles at high speed or a change in appearance of a display that conveys anthropomorphic properties (e.g., an LCD display normally depicting images intended to represent eyes and eyebrows animating the images to suggest squinting, downturned brows and eye color turning red, audible noises or a voice expressing anger, and/or the like). In general, the system can use cues of physical or digital animation that can draw upon a broad social vernacular of body language to convey emotional responses to events.

Once a divergence is detected, in at least some embodiments, in order to maintain parity between the physical environment and the virtual representation of it, the system can enlist agents **104** to survey the extent and nature of the divergence. In the case of collapse of a structure having many components **402** (such as blocks), one can appreciate that the process of restoring parity between the physical and the virtual can take some time and might involve a number of agents **104** navigating around scattered components **402** to provide data regarding their new positions and locations. In such instances, the system can cause such a survey of the landscape to be completed prior to formulating a response, particularly if the processes guiding an agent's **104** actions would dictate attempting to rebuild the structure. In some cases, the survey of the environment following a divergence such as an uncontrolled collapse of a structure might yield an incomplete mapping of all components **402**, either because some components **402** are obscured by others from all means and positions of observation available to agents **104** or because the components **402** are no longer in the formal environment (e.g., the agents **104** were operating on a table and one or more components **402** have fallen to the floor below). The uncertainty introduced in such a situation can factor into the actions formulated for the agents **104**, particularly, as in the example of an inability to account for all components **402** previously present in a structure, with respect to restoring the configuration of components in physical space prior to the divergence. Some embodiments might also include agents **104** engaging in a survey process that includes sorting and organizing components **402** in order to clear an area for rebuilding and/or to assess what components **402** had been involved in the collapse and, among these, what components **402** were no longer accounted for (e.g., if they had tumbled outside the areas accessible to agents). Completing this, agents **104** can then determine a course of action, whether rebuilding using components **402** and supplementing for those missing with others available elsewhere as needed, notifying a user that further direction is required, or performing some other action in response.

Localization can be performed using any suitable means. In at least one embodiment, an active method is used, such as by emitting signals and determining location based on the reception of signal reflection. These include ultrasonic-based or light-based measuring techniques. This type of approach may be enhanced by elements deliberately placed in the range of the working environment such as reflectors or beacons that may be triggered to respond according to the emitted signal. More passive methods also exist, including those based upon acquiring images from a camera or other optically-based means of gathering data regarding the physical (spatial) environment. Passive processes may also make use of markers or other elements intended to structure an environment for easier localization by systems developed to recognize such markers. For non-optical passive systems such as those relying on magnetic field detection, some distribution of markers within range of the space available for agent operation may be used for localization.

In at least one embodiment, working surface **407** (or mat) on which mobile agents **104** operate may provide localization information by virtue of readable codes (e.g. optical, RFID, and/or magnetic codes) present on surface **407**. In at least one embodiment, an agent **104** can optically detect and decode marks on surface **407** so as to make determinations regarding the agent's **104** environment and its location within that environment, as described in related U.S. Utility application Ser. No. 12/788,605 for "Distributed System of Autonomously Controlled Toy Vehicles", filed on May 27, 2010 and issued on Jan. 15, 2013 as U.S. Pat. No. 8,353,737. In other embodiments, however, working surface **407** may be omitted and/or may not provide localization information; rather, mobile agents **104** may use other mechanisms for localizing themselves, including for example triangulation with objects or signals in the environment, optical detection of other agents **104** and/or reference features, and/or the like, or any combination thereof.

Any of a number of approaches can be used to structure an environment with information or points of reference that facilitate determination of position or orientation based on local observation and/or reading of codes. For example, in at least one embodiment, mobile agents **104** employ an optical system of observation in which a camera on agent **104** collects images of a portion of working surface **407** containing an optical code. The optical code can include any suitable pattern or similar structured mark. Other systems involving non-optical codes (such as RFID and/or magnetic codes) can also be used.

For example, as described in the above-referenced related U.S. Pat. No. 8,353,737, working surface **407** can include an optically readable encoding scheme that is co-linear with a preferred path or paths of travel. In this manner, the codes can provide information regarding location along a track segment for mobile agents **104**. Such a method thus provides a means of localization to one of many particular reference points and lends itself to deducing a relative position between such points by taking advantage of the regularity in code structure. Referring now to FIG. **16**, there are shown examples of codes **601**A, **601**B that are arranged according to such a structure.

In at least one embodiment, as shown in the examples of FIG. **16**, a meter line is included, consisting of a line of repeating tick marks or similar indicators spaced closely and located co-linear with the preferred path or paths of travel. Using a meter line as a reference in this manner, the precision at which relative positioning can be calculated based on any absolute position established by a code's reference point can be defined by the frequency of the meter line's constituting tick marks or dashes along a given length. Other approaches may incorporate metering directly into a line provided as a guidance path. For example, in codes **601** that form a grid such as the hexagonal grid of FIGS. **6** and **14**, tick marks or some other indicator(s) can be included in borders between cells of the grid.

As shown in the example code **601**A of FIG. **16**, in at least one embodiment, rather than using a line of uniform width, the system uses a line whose width alternates in regular steps between a thicker section and a narrower one. While the path remains continuous, the regular interval for step changes in width yields an appearance similar to a symmetrical square

wave; this can be useful for monitoring travel distances between other positional information marks.

In yet another embodiment, as shown in example code **601**B, a travel path's width may change linearly at regular intervals such that it expands and contracts in an appearance more consistent with a sawtooth form. Such an approach facilitates determination of relative position between the expansion and contraction points along the path according to the width of the line at any particular point relative to the maximum and minimum widths.

In at least one embodiment, a scheme of encoding localization is adopted, wherein mobile agents **104** may have preferred paths of travel within the working environment (for example, along a track segment as described above and/or in the above-referenced related patent). It may be advantageous, however, for an encoding scheme to support localization without association to a particular path or paths of travel. For example, the encoding of reference information can support recognition from possible orientations of observation away from the surface. This can be accomplished, for example, by analyzing data gathered during observation such that if there is a preferred or even a necessary orientation for observation of a mark or marks to enable successful recognition, observation data can be adjusted to find the correct orientation. An example of such a scenario might involve images collected of a pattern or a portion of a pattern containing encoded information on the working surface. If the pattern has a preferred orientation for analysis, processing can adjust an image of the surface to find the preferred orientation. In this example, the marks may enable determination of position. The processes that correct for observational orientation away from the mark's preferred orientation can also provide the orientation of agent **104** relative to the working surface.

In at least one embodiment, codes are presented as marks designed to be read from multiple orientations. Referring now to FIG. **6**, there are shown examples of such machine-readable codes **601** that can be read from multiple orientations. Codes **601** can be used, for example, in connection with any of the arrangements and methodologies described above, and can be used, for example, across working surface **407** to support localization of an agent **104** operating on surface **407**, according to one embodiment.

As shown in FIG. **6**, in at least one embodiment, data is encoded in concentric hexagons and circles of varying line thicknesses, effectively constituting a series of radial bar codes. However, one skilled in the art will recognize that any other types of machine-readable codes **601** can be used, and that such codes **601** can take any suitable form and appearance; they may or may not be visible to the human eye. In at least one embodiment, the encoded data can contain local position information (e.g., ordinal distances to a reference origin). However, because codes **601** are intended to support reading from multiple directions, deducing an observer's orientation relative to codes **601** can become more difficult. As a remedy to this, supplementary marking can enhance codes **601** by indicating an orientation. An example of a convenient approach to providing this improvement is to reserve the center of a concentrically organized mark for indicating orientation with an arrow or a dot indicating a reference orientation or a preferred cardinal direction. The indicator may or may not use the familiar convention of a magnetic compass's layout, however, as it can assume any form that establishes a reference orientation. Referring now to FIG. **15**, there are shown examples of machine-readable codes **601** that include orientation indicators **1501** of various types. One skilled in the art will recognize, however, that orientation indicators can take any desired appearance or form.

In another embodiment, information can be encoded in machine-readable codes that have a preferred orientation, such as Quick Response (QR) codes or the like. A benefit to using a marking scheme based on QR codes (or the like) is that the geometry is both well disposed to arranging in a grid pattern and the scheme is suitable to encoding a relatively large amount of information in a compact space. QR codes contain reference marks that indicate a preferred orientation as well as scale. In at least one embodiment, the system provides a working surface **407** containing a grid of marks in the form of QR codes (or the like). As with the radial or hexagonal codes **601** described previously in connection with FIG. **6**, the QR codes can contain a variety of information such as unique identification codes, material IDs, and/or the like. Neighboring codes on a surface can provide differing information.

Referring now to FIG. **20**, there are shown additional examples of code types, according to various embodiments, each using a concentric code scheme. In each example of codes **601**C, **601**D, **601**E, **601**F, **601**G, data is encoded in the sequence of line weights radially ordered from the center of each cell **2001**. In at least one embodiment, the empty space **2002** in the center of each cell **2001** may be filled with a marker or other identifier, for example to indicate a specific spatial reference, a reference to an ordinal direction, and/or an area designation (such as to indicate one building area versus another). In some of these examples, a meter line bounding each cell **2001** provides reference for localization in transitions across cells **2001**. Alternatively, as shown in code **601**E, cells **2001** can be spaced apart from one another to establish borders.

In at least one embodiment, line weights can indicate the value of a specific code element (such as a cell **2001**), so that a sequence of closed lines radially arranged around a cell's center can be read according the line weights of each radial to yield the encoded information. In at least one embodiment, cells **2001** are of constant size and arranged in a regular formation, so as to provide an ability to deduce information about relative position and, in instances in which the encoded information contains spatial location and/or the cell **2001** contains a reference point either marked within the cell **2001** as a graphic element or as readable data, global position can be determined from relative position away from a point of known spatial location.

In some contexts, it may be useful to provide different types of encoded data on a particular surface **407**. For example, in embodiments in which multiple working surfaces **407** might be in use simultaneously, each surface **407** can include interspersed codes **601** that uniquely identify the particular surface **407**. Alternatively, any of the codes **601** described herein can also include information identifying the particular surface **407** in use. Such a technique can help avoid potential uncertainties introduced by using multiple surfaces **407** that might otherwise be confused with one another.

Referring now to FIG. **19**, there is shown an example of a working surface **407** having a mixed use of code types. Hexagonal codes **601**A facilitate reading from multiple directions; closely spaced code lines facilitate precision in localization in areas of surface **407** designated for building. Such codes **601**A are therefore well-suited for generalized placement of components **402** such as blocks.

Code **601**B is located in an area of surface **407** designated for transit, and is therefore disposed toward straight line travel at a higher speed than the slower motion typically used for component **402** manipulation and placement. Accordingly, markings within code **601**B are longer and are spaced further apart. In at least one embodiment, as shown in the example of

FIG. **19**, code **601**B includes white square-tooth meter bars bounding each side, to assist in recognizing the transition from one code zone to another. In some cases, some uncertainty may exist in the time between an agent **104** leaving a known position in one code base to establishing a new reference position in the other code base.

With respect to localization, a portion of the data can be at ordinal distances from the code's geometric center or some other point within the code to a reference origin for the working space (such as, in the case of a mat or other working surface **407**, a particular corner). Additional information may include the dimensions of the code itself; alternatively, code dimensions can be specified and known in advance by agent **104** or its governing control system; for example, agent **104** can reference look-up information that permits localization to any point within the outline of the code when coupled with the ordinal distances of the code's reference point. While QR codes have a preferred orientation, in at least one embodiment, the codes can be read at any orientation, and references points within the codes can allow agent **104** to determine preferred orientation; from this, the relative orientation of observation with respect to the code (and thereby working surface **407**) can be determined.

In either the case of using a radially designed encoding scheme or an encoding method with a preferred orientation such as QR codes, it is not necessary to maintain uniformity of size among the code marks. In at least one embodiment, some portions of working surface **407** may have areas in which precise movements of the mobile agents may be more important than in other areas. An example might include portions of working surface **407** intended to be dedicated as a transportation route and therefore kept clear of structures might have less need for localization to very tight precision, but instead might favor speedy navigation through such areas. In this case, larger codes that might be more conducive to reference while traveling at a faster speed can be the better choice for these areas while in zones of working surface **407** that are intended to support structures erected by mobile agents **104** might benefit from a smaller size of codes to better enable the agents to control their positioning and component **402** placement to smaller tolerances.

In at least one embodiment, the entire code need not be captured in order to decode the data. This may be particularly applicable when a radial coding technique is used. One of the advantages of such a scheme is that the omnidirectional presentation of data from a center point permits reading the complete encoded data from visibility of a single radial vector. Accordingly, radial coding can afford a greater likelihood of fully reading the encoded data when only a portion of a code **601** is visible or is captured, as opposed to an encoding scheme in which requires full capture of a code **601** image for interpretation.

The localization methods discussed thus far provide techniques for encoding locational data within a code consisting of a pattern of marks. In other embodiments, however, other methods are used for a mobile agent **104** to deduce position and orientation from the interpretation of one or more codes on a working surface **407**. In one embodiment that does not rely on decoding data stored in local codes, the layout of the entire pattern of marks on working surface **407** may be known in advance, such that determination of location is based upon matching the codes captured in local observation to corresponding location(s) within the larger pattern. In this scenario, the approach is analogous to finding a location on a map based on identifying a subset of local features within a larger spatial feature set.

For example, a pattern of marks covering working surface **407** or those parts of surface **407** that are intended for agent operation might consist of pixels in a non-repeating pattern such that local observation of the pattern does not yield multiple potential locations. In such an embodiment, a minimum number of pixels is captured within an observation to permit matching of the local features within the larger set constituting the entire pattern. In matching the local features, it is possible that the orientation of observation yields a local pattern that requires some manner of re-orientation to match the orientation of the global reference pattern as stored as part of the localization process. A transformation can be applied to reorient the pattern; such transformation also yields information regarding the orientation of observation with respect to working surface **407**.

System Architecture

In at least one embodiment, the system is implemented using various components that can communicate with one another using any suitable means. In at least one embodiment, the system can be implemented using a set of mobile agents **104** in which control is divided between the agents **104** and a wirelessly connected central device or split further among mobile agent **104**, a central device that actively maintains parity between the physical state of the operating environment and a virtual one, and a device dedicated to providing a user with direct control of mobile agent's **104** motion and actions, as described in related U.S. Utility application Ser. No. 13/963,638 for "Integration of a Robotic System with One or More Computing Devices", filed on Aug. 9, 2013.

Referring now to FIG. **13**, there is shown an implementation architecture according to one embodiment. As depicted in FIG. **13**, in at least one embodiment, the system **1300** is hosted by a host device **108**, which may be implemented on any suitable computing device, whether mobile or stationary, such as for example a smartphone, tablet, laptop computer, or the like, and/or any combination thereof. In at least one embodiment, host device **108** supports and runs various algorithms contained in software which implement operations of the overall system. Host device **108** and associated software are collectively referred to herein as a base station or central control unit. Although FIG. **13** depicts all communication passing through host device **108**, in alternative embodiments, agents **104** can communicate directly with one another, and host device **108** can even be omitted altogether.

Any of a variety of different devices can serve as host device **108**; examples include smartphones, tablet computers, laptop computers, desktop computers, video game consoles, and/or any other computing device capable of supporting the control software for the system. In at least one embodiment, such a device can use any suitable operating system, including for example and without limitation: iOS or MacOS, available from Apple Inc. of Cupertino, Calif.; Android, available from Google, Inc. of Mountain View, Calif.; or Windows, available from Microsoft Corporation of Redmond, Wash. In at least one embodiment, host device **108** is an iPhone or iPad, available from Apple Inc. of Cupertino, Calif., running a suitable software application ("app"). In at least one embodiment, software for controlling host device **108** may be provided via any suitable means, such as a downloadable application ("app") that includes the appropriate functionality and gameplay structure to operate agents **104** in physical space and to plan, coordinate and execute interactions among agents **104** including gameplay, construction, cooperation, conflict, and/or the like; these interactions can take place according to rules, and under the direction of user input, artificial intelligence, or a combination thereof. In at least one embodiment, host device **108** maintains the state of agents

104, and sends and receives commands to and from agents 104. Host device 108 may also include a suitable user interface for facilitating user interaction with the system.

For purposes of the description provided herein, agents 104 are referred to as mobile agents 104, although some or all of such agents 104 may be stationary. As described above, agents 104 can be a type of component 402 within an architectural framework that includes other components and elements, including passive, semi-active, and active. In at least one embodiment, agents 104 are vehicles such as toy construction vehicles, although they may be other objects or components.

In at least one embodiment, host device 108 is the central node for all activity and control commands sent to agents 104, whether the commands originate from algorithms running on host device 108 or are routed through host device 108 but originate from control devices 101D through 101K controlled by users 109D through 109K who are physically present or remotely located. In other embodiments, a more distributed architecture may be implemented wherein host device 108 need not be the central node for all activity and control commands.

The example shown in FIG. 13 includes a specific number of controllers 101D through 101K, agents 104, and AI-controlled agents 104J. One skilled in the art will recognize that the particular quantities of the elements depicted in FIG. 13 and described herein are merely exemplary, and that the system can be implemented using any other quantities, and/or with some of the elements being omitted if appropriate. In addition, agents 104 are depicted in FIG. 13 as vehicles, although they can assume any suitable shape.

In the architecture of FIG. 13, system 1300 is implemented in a centralized manner, wherein controllers 101D through 101K and agents 104, along with other elements, communicate with host device 108. As depicted, in at least one embodiment, multiple users 109 (or players) can control multiple agents 104, while other agents 104J may be controlled by means of artificial intelligence.

As shown in FIG. 13, any number of external devices may be connected to host device 108 via any suitable communications protocol, such as for example a cellular/Internet connection 111. The various external devices may or may not be identical to host device 108. Some or all of the external devices serve as controllers. FIG. 13 depicts various examples of devices that can be used as controllers, including: game console 101B with any number of controllers 101J, 101K (controlled by users 109J, 109K, respectively): laptop computer 101D (controlled by user 109D); stand-alone controller 101E (controlled by user 109E); and smartphones 101F, 101G, and 101H (controlled by users 109F, 109G, and 109H, respectively). In at least one embodiment, any or all of controllers 101 can be an iPhone or iPad, available from Apple Inc. of Cupertino, Calif., running a suitable software application ("app"). Controllers 101J, 101K, 101E can be of any suitable type, including for example controllers that are commonly used with console game devices.

In at least one embodiment, a game or play environment is hosted on host device 108. Host device 108 supports gameplay and/or other manipulation of agents 101, components 402, and/or other elements in physical space in a physical environment (such as on surface 407) as well as in a virtual environment under the direction of software; the state of the virtual environment is maintained in memory on host device 108 and/or elsewhere.

As described in related U.S. Utility application Ser. No. 13/963,638 for "Integration of a Robotic System with One or More Computing Devices", filed on Aug. 9, 2013, in at least one embodiment, base station software, running on host device 108, maintains a virtual model of the environment, including positions of agents 104 and components 402, and can perform operations to reconcile such virtual model with detected locations of agents 104 and components 402 in physical space. In this way, host device 108 continuously maintains parity with events in the physical environment by updating stored information relating to position, direction, velocity and other aspects of agents 104 and/or components 402. In at least one embodiment, host device 108 ensures that at any point in time the states of the physical environment and the virtual environment are identical (or substantially identical), or at least that the state of the virtual environment is a representation of the physical state to at least a sufficient degree of accuracy for gameplay purposes. In at least one embodiment, the system allows for bi-directional influence between the states, such that events occurring in virtual space can influence the physical state and vice-versa. Priority can be given to either the virtual or physical state, as described herein and in the related patent application.

In at least one embodiment, artificial intelligence software runs on host device 108 and issues commands (via wireless communication mechanisms or other mechanisms) to control one or more agents 104J. In other embodiments, software for controlling agents 104J may be located elsewhere, and/or may run on agents 104J themselves.

In at least one embodiment, host device 108 can simultaneously serve as a control unit for a human user 109A controlling an agent 104. Such functionality can be provided on host device 108 while host device 108 also serves as a conduit and interpreter for control commands incoming from other devices 101D through 101K controlling other vehicles 104. In another embodiment, host device 108 does not serve as a control unit for a human user 109, but rather operates as a dedicated central control unit.

Player controllers 101D through 101K may communicate directly with host device 108 or they may communicate via intermediary devices. For example, in FIG. 1, controllers 101J and 101K communicate with host device 108 via game console 101B. Similarly, any number of tiers of connections can be configured between player controllers 101D through 101K and host device 108, such as one or more smartphones connecting to host device 108 through a succession of devices networked back to host device 108.

It can be appreciated by one skilled in the art that as the number of users 109 and the number of AI-controlled opponents increases, the performance demands on host device 108 likewise increases. Depending on the number of agents 104 and the capacity of host device 108, the increases in computational requirements, for example, can impact performance. In at least one embodiment, the system is implemented in a distributed environment, wherein, for example, host device 108 has the capacity to distribute portions of its logic to any number of devices to which it is connected and which are capable of supporting execution of said logic. Examples of these include smartphones, tablet computers, laptops, game consoles, and/or the like, but can also be any suitable devices capable of providing the necessary support to run the logic assigned to it. In at least one embodiment, for example, some of the processing tasks associated with operating system 1300 can be distributed to one or more controllers 101D through 101H.

It is not necessary that the distribution remain local; in at least one embodiment; logic can be distributed to, for instance, one or more remotely located servers (not shown). A modular design to the structure of host device 108 can lend itself to convenient distribution of logic, and the type of logic

processes offloaded from host device **108** need not be of one particular type of function or process. In at least one embodiment, for example, the distribution of logic can be prioritized according to computational and memory demand, such that those most taxing of host device's **108** resources are the first to be allocated elsewhere.

It is not necessary that the wireless interface employed to communicate with and/or among controllers **101**D through **101**H be identical to that used to connect to agents **104** under the users' **109** control. For example, it is possible that host device **108** communicates with controllers **101**D through **101**H via Wi-Fi, while host device **108** communicates with agents **104** via Bluetooth. In such a case, host device **108** can serve as a bridge between a high-power protocol (such as Wi-Fi) and a low-power protocol (such as Bluetooth). The advantage of such an approach can be appreciated in instances in which agents **104** controlled by users **109** via host device **108** or controlled directly by host device **108** (in the case of agents **104**J under AI control) have limited power budgets.

As described above, controllers **101**D through **101**H can be implemented using any suitable devices. Again, less sophisticated controllers **101**J, **101**K can be used, such as wireless gamepads or joysticks. In instances in which a gamepad or joystick **101**J, **101**K is used which is not equipped with a wireless communication module supporting direct communication with host device **108**, the connection to host device **108** can be achieved through a game console **101**E or other intermediary, or through the use of a dongle (not shown) that plugs into an appropriate port on host device **108**. Such a dongle links wirelessly to controller **101** and passes communications through the port into which it is plugged. Alternative embodiments of the dongle can include units that implement a bridge between a wireless protocol compatible with controller **101** and a wireless protocol compatible with host device **108**.

In addition to passing users' **109** commands through host device **108** to vehicles **104**B through **104**F, controllers **101**D through **101**H can also receive updates from host device **108** that reflect the current state of the game. In at least one embodiment, some or all controllers **101**D through **101**H can be equipped with one or more output devices (such as a display, speaker, haptic output mechanisms, and/or the like), so as to be able to enhance the play experience based on such received state information. Such enhancements can include, for example, renderings, haptic output (e.g., vibration) and/or audio representing action on the game track and/or augmenting such action to increase the sense of realism or provide details otherwise not visible to a user **109**.

In at least one embodiment, the visual, haptic, and/or audio information presented to users **109** through some or all controllers **101**D through **101**H can be unique to each device. Various agents **104** may be in different states at any given time (with respect to, for example, position, speed, status, action, and the like); in addition, in the case of multiple users **109** controlling a single agent **104**, user roles or control may be different. Therefore, the various cues and data presented to each user **109** can be tailored to the current state of the agent **104** and the user's **109** particular role.

In various embodiments, users of controllers **101**D through **101**H may be physically present, so that controllers **101**D through **101**H communicate directly (via wireless protocol such as Bluetooth) with host device **108**. Alternatively, users of controllers **101**D through **101**H may be remotely located and connected via a host network (such as network **111**). Controllers **101**D through **101**H may rely on information reported back from host device **108** regarding game status.

As mentioned above, in at least one embodiment, multiple users **109** can control a single agent **104** in a game. For example, three users **109** might control a single agent **104** in which one user **109** is providing directional and speed control, another user **109** can control arms or a forklift on agent **104**, and a third user **109** can control an auxiliary manipulating element. In such a scenario, controllers **101** provide information tailored to the role filled by each user **109**.

In at least one embodiment, the system is implemented using an architecture that provides division of control such that high-level functions, such as overall construction task assignment, are assumed by a control device external to mobile agents **104**, and low-level commands, such as manipulation of individual components **402**, are managed onboard each mobile agent **104**. Such an architecture can be implemented, for example, using the techniques described in the above-cited related applications. In other embodiments, any other suitable architecture can be used, including for example those that do not necessarily rely on offloading more computationally intensive processes to peer devices.

In at least one embodiment, even if mobile agents **104** do not need to rely on peer devices for processing or other high- or low-level functionality, such a device can still be provided for allowing a user to provide instruction to one or more mobile agents **104**.

Component **402** Recognition

In at least one embodiment, components **402** of differing types can be in use simultaneously on working surface **407**; these components **402** may include mobile agents **104** and/or other components **402**. Indeed, the working surface **407** may itself be considered a type of passive component **402**. As noted, components **402** can be categorized as passive, semi-active or active, and, as described, components **402** may differ in size, shape, mass and/or other aspects of their physical properties. In order for the system to function optimally, in at least one embodiment the system controlling mobile agents **104** recognizes components **402** and determines each individual component's **402** type.

Components **402** may also have other attributes which distinguish them in terms of particular function; such differences may or may not be apparent on visual inspection. In at least one embodiment, mobile agents **104** operating on the working surface have the capacity to identify components **402** (including other mobile agents **104**) accurately and reliably as well as determine the position and orientation of components **402** on working surface **407** and/or with respect to some reference point, in order to successfully and reliably move and manipulate components **402**.

Any of a number of methods can be used for component type recognition and component **402** position/orientation recognition. In at least one embodiment, an optically-based approach can be used, employing at least one of: 1) machine-readable codes, 2) pure image processing and 3) structured light. These methods can be used singly or in any suitable combination with one another.

For example, a structured light approach can be used, either alone or as a supplement to one or both of the other methods. A structured light scanner can be included in one or more agents **104**. One example of the application of structured light involves projection of a known pattern of pixels, such as a grid, on a scene, and observing the manner in which the known pattern deforms when striking surfaces. Thus, structured light yields a geometric discretization of space. Since structured light may omit information regarding color or texture, differences in components **402** that are detectable based on color may not be easily distinguishable by structured light methods. Additionally, distinctions based on differences in

surface features that are modest relative to the resolution of a structured light scheme may also be difficult to detect. Thus, in at least one embodiment, it may be useful to supplement structured light with one or more supplemental recognition methods.

In an embodiment using machine-readable codes, certain aspects of the methods previously described to facilitate localization on working surface **407** may lend themselves in a similar fashion to component **402** recognition. Specifically, the use of geometric patterns and/or encoded data such as QR codes can assist in recognizing component type, face **503**, and/or orientation. In at least one embodiment, the use of a 2D encoding scheme such as a QR code (to mark the face **503** of a component **402** can imply a preferred component **402** orientation in any observation of the machine-readable code. Additional information that can be helpful in identifying important component **402** characteristics such as component type, component **402** dimensions or specific face **503** of a component **402** (on which the mark is applied) can be encoded within the machine-readable code.

In at least one embodiment, an encoding scheme is provided for facilitating a mobile agent's **104** recognition of a component **402**; this scheme can, for example, organize the encoded data into an appropriate structure such as an ordered sequence. An example of such a sequence is a three digit code in which the first two digits identify the component type and the last digit indicates the specific face **503** of the component **402** (e.g., a component **402** in the shape of a cube would have six possible specific faces: north, east, south, west, top and bottom). Such an approach allows mobile agents **104** to have information available regarding the component **402** geometries that correspond to a particular component type ID code. Such information may be stored in memory on mobile agent **104** or may be downloaded or accessed as needed. One skilled in the art will recognize that such an encoding scheme is merely exemplary, and that other schemes can be used.

In another embodiment, image data and/or an ID code are passed to another device for processing. Such an approach can be used, for example, in embodiments in which mobile agents **104** are centrally controlled or monitored by a single device such as host device **108**. Image data and/or an ID code can thus be processed at host device **108**, with the interpreted results being transmitted to mobile agent **104**, or with instructions based on such results transmitted to mobile agent **104**.

In yet another embodiment, component **402** information can be incorporated into the encoded data itself, such as the orthogonal dimensions of the component's **402** face **503** or data indicating component **402** shape and subsequent information capturing face dimensions or other defining characteristics. One skilled in the art will recognize that, in some situations, the described ID encoding scheme may not be as well disposed to characterize components **402** with geometries that are more complex than or diverge from a conventional cube form (e.g., components **402** with geometries composed of faces of size or proportion insufficient to displace codes as discussed thus far at a useful size). In such cases, alternative encoding formats might be considered to better suit a broader array of forms while still retaining the basic approach of providing size, type, and orientation data in a coded mark on a component's **402** face **503**.

Just as the appearance of a machine-readable code (also referred to as a "mark") that provides reference to a preferred orientation can be used to determine the relative rotational orientation of the marked surface normal to the observer, the manner in which the observed machine-readable code's shape diverges in appearance from its appearance when viewed normal to its surface provides information about the relative position and orientation of the component **402** in space with respect to a point of observation. Specifically, in situations where a graphical data encoding scheme is employed that adheres to a standard geometric format, deviations in the observed machine-readable code from the standard format can be used to determine position and orientation of the component **402** in relation to a camera or scanner on agent **104**.

For example, for a QR code, the assumed form is square. When such a code is viewed outside a vector normal to the center of the code, the viewing perspective distorts the shape in predictable ways. Based on an understanding of how geometries are transformed by perspective, the system can deduce relative position and orientation of the face bearing the code with respect to the observer. Thus, in at least one embodiment, the system processes the observed appearance of the code to yield relative distance and orientation, using knowledge of the code's normal appearance and size, both of which can be made available either through advance knowledge, or by reading the code, or by some combination of both.

In some cases, image resolution, observational distance, and/or other factors may limit the system's accuracy in resolving the relative position and orientation of a coded face. Consequently, in at least one embodiment, other methods are used to supplement the information provided through analysis of the coded mark's appearance. For example, additional marks may be provided on a component **402** in one or more locations. For component forms with flat surfaces, corner points may be marked so as to establish references that coincide with readily identifiable points on a component's **402** geometry. For example, for a component **402** that is a cube-shaped block, reference marks may be placed at the eight corners of the cube, with four marks being located adjacent to any particular face of the cube-shaped block. In instances in which a component's **402** face **503** is larger than the code mark located on it, reference marks located at the limits of faces (i.e., the corners) provide an improved perspective that can help to identify a particular face's position and orientation relative to a point of observation.

In various embodiments, such reference marks can assume any of a number of forms. In at least one embodiment, a scheme is adopted that serves to improve the reliability of recognition of both the mark and its relationship to the component's **402** face **503**.

Referring now to FIGS. **7**A through **7**C, there are shown some examples of reference marks **701** as they may appear on a face **503** of a cube-shaped component **402** such as a block. As shown in FIG. **7**A, known distances between reference marks **701** can be used to determine relative position and orientation of the component **402** from a camera or scanner (not shown). Such reference marks **701** may be placed on faces **503** in addition to machine-readable codes **601** as described above; however, such machine-readable codes **601** are omitted from FIGS. **7**A through **7**C for clarity.

As shown in FIG. **7**B, in at least one embodiment, mark **701** positioned at each corner of face **503** can be shaped and oriented so that it points to its associated geometric corner. Such an approach can facilitate the resolution of separate, individual faces **503** when an observation may include multiple faces or an incomplete view of one or more faces **503** and/or codes. In such instances, the creation of a point cloud of data points from reference marks **701**, each mark **701** representing an associated geometric point, can yield a set of points that may be challenging to resolve correctly into separate faces **503**. One reason for this is that spatial datum indicating a corner location does not necessarily indicate how the surfaces that define it converge. Put into mathematical terms,

if one has only knowledge of a single corner point for a three-dimensional cube, the valid positions for any of the three faces **503** whose intersection defines the corner point consist of the full range of possible positional solutions of the cube rotated about the corner point in all three dimensions. Accordingly, the use of reference marks **701** to provide indication of a face's **503** direction of extension relative the marked point can facilitate resolution of faces **503** from a point cloud of reference points.

In some cases, reference marks **701** on separate faces **503** may be situated in close proximity such that observation from particular vantages may yield difficulty identifying a mark **701** or ambiguities about the reference point. For example, if a reference marking scheme uses marks **701** at corner locations on every face **503** of a cube, then the cube's orientation to a point of observation that presents a corner with more than one of its defining faces **503** visible will likewise reveal multiple reference marks **701**. If the reference marks **701** extend fully to the local edges of the cube, then it may become difficult to resolve the resulting aggregate shape into separate reference marks **701**. For this reason, it may be advantageous to offset reference marks **701** away from the edge of each face **503** (as shown in FIGS. **7**A through **7**C), so that observations that may include multiple reference marks **701** indicating the same point can be more easily identified as such.

The above-described techniques of marking corner points as a means of determining spatial characteristics of faces **503** is merely one example of an approach that can be used in connection with the present system and method. Other techniques can be used. For example, edges provide a basis for geometric delineation in a fashion similar to corner points, and line or edge detection provides an alternative means that may be pursued separately or in supplement to a corner marking scheme. Edge detection is well known in the art of image processing, and can be particularly useful in the context of the present system and method, particularly if the potential component geometries might be known in advance or may be obtained (by means such as a component ID code). In some instances, edges may offer advantages over corners, owing to their definition as a curve or vector rather than a point. In at least one embodiment, therefore, marking schemes may be directed toward highlighting edges in addition to corners or as an alternative to a corner marking approach.

Any suitable form can be used for marking surfaces with machine-readable codes **601** and/or reference marks **701**. In at least one embodiment, color can be used to further aid in identifying particular component types or aspects thereof. In at least one embodiment, marking can be accomplished by applying ink (of any suitable color or combination of colors), and/or by texturing or relief, and/or by some material variation. In at least one embodiment, marks are applied to surfaces with an ink that is transparent in the visible spectrum, but visible at wavelengths of light outside the visible range such as ultraviolet or infrared frequencies. The advantage to this approach is that the marks are hidden from users and therefore do not distract or detract from the appearance of the components **402**.

Since components **402** may have potentially complex surfaces and/or may have mechanical or other functionality, it is possible that some components **402** may have faces **503** lacking sufficient or convenient area on which to locate a machine-readable code **601** or reference mark(s) **701**. In these instances, it may still be desirable for a component **402** to include a mechanism for validating the presence of a surface, such as face **503**, despite an inability to support all or part of the identification marks (machine-readable code **601** or reference mark(s) **701**) that would otherwise be present. In at least one embodiment, an indication is provided (in addition to or as part of machine-readable code **601** or reference mark(s) **701**) that the code **601** and/or reference mark(s) **701** is/are incomplete. Such an approach can serve to curtail repeated observations of the surface in attempt to capture a complete machine-readable code **601**.

Thus, in at least one embodiment, a pattern can be applied across the entirely available space on a particular face **503**, wherein such pattern is distinct from the type of marks (machine-readable code **601** or reference mark(s) **701**) applied in coding the component face **503**; such pattern indicates an incomplete machine-readable code **601** or reference mark(s) **701**. An example is a striped pattern whose orientation is 45° offset from the prevailing edge of face **503**. An observation that detects this pattern can determine that the component face **503** is/are incomplete or present no encoded data, while also possibly delineating some portion of the geometric limits of that face **503**. In this manner, the system can still obtain information that may be relevant toward developing a comprehensive understanding of the overall spatial positioning and orientation of the component **402** (as well as its relationship to other components **402** and to surface **407**.

Using the techniques described herein, therefore, the system and method provide an environment that supports localization of mobile agents **104** operating on a working surface **407**, and that facilitate interaction of such mobile agents **104** with components **402** such as blocks. The techniques described herein can be used to allow mobile agents **104** to determine position and/or orientation of such components **402** with respect to mobile agents **104**, other components **402**, and/or working surface **407** (which may itself be considered a component **402**).

In at least one embodiment, each mobile agent **104** has an understanding of the limits of the operating environment and/or its position within said environment; thus, through the processes of identification and recognition of components **402** and their spatial disposition relative to the agent's **104** known position and orientation, each agent **104** is able to understand the spatial disposition of the components **402** in the context of the operating environment's limits and/or a global reference point (which may be, for example, a common origin point on working surface **407**). Consequently, both working surface **407** and other components **402** constitute a structured environment that can together or separately support localization by mobile agents **104**.

In various embodiments, the system can use either or both of the working surface **407** and the current knowledge of component arrangement, and/or can switch from one to the other. In one example, wherein a mobile agent **104** is tasked with moving a particular component **402** at a known location some distance from its current position, the system may plan a path which will take agent **104** to component's **402** location, preferably in a manner that will dispose agent **104** to lift, grip or otherwise take position of component **402** in a convenient fashion. While mobile agent **104** is either traveling to component's **402** location or moving with component **402** to its intended next location, agent **104** may make use of information encoded or otherwise marked for reference on working surface **407** (or with reference to a global position). Once mobile agent **104** is sufficiently close to component **402**, however, agent's **104** position and orientation with respect to component **402** may become more relevant to the immediate task of capturing or manipulating component **402** than is mobile agent's **104** absolute position on working surface **407**. The transition from an emphasis on monitoring a global position and orientation via the working surface to one directed at localizing instead with respect to component **402** identified

for capture or manipulation may be based, for example, on recognizing the potential error present in the mapped location of targeted component **402**. Relying on map data to direct mobile agent **104** to a proximate location of component **402** provides a means for mobile agent **104** to reach components **402** efficiently and reliably without line-of-sight. Once mobile agent **104** is within close distance to the component **402** such that determining component **402** position and orientation with respect to agent **104** via processing data provided through agent's **104** onboard sensors becomes possible, it may be preferable to switch to this approach until component **402** has been captured by agent **104**. At such a point, mobile agent **104** may revert to localizing with respect to working surface **407** (or with respect to agent's **104** global position).

Similarly, placement of component **402** in its intended position and orientation may likewise involve a switch to preferentially localizing with respect to other components **402** potentially neighboring the intended final position and orientation of the component **402** carried by mobile agent **104**. In such a case, the component's **402** spatial data can be established with accuracy to the limit of that supported by localization scheme of working surface **407**, for example by a downward-pointed camera installed on the mobile agent and exploiting the known geometries of mobile agent's **104** geometries as well as those of the component **402** and any other components **402** relevant to the placed component's **402** final position (e.g., components **402** stacked beneath the location of the placed component **402**).

In at least one embodiment, multiple mobile agents **104** may operate simultaneously on working surface **407**, engaged in separate tasks or working cooperatively (or competitively, or in conflict with one another, whether simulated or actual). Regardless of whether mobile agents **104** are actively cooperating with one another, information derived through separate observations of working surface **407** can be combined into a single, global model of working surface **407** environment. Such an aggregation of data may yield a more comprehensive or more complete overview of all components **402** located in the relevant space of working surface **407** as well as more accurate information related to the respective position and orientation of said components **402**. Presumably, if the system employs an architecture in which a virtual model of the physical space in which the mobile agents **104** are operating resides in a central node such as host device **108**, then such a model can incorporate all relevant information related to all component types, positions, and orientations obtained separately via mobile agents **104** and/or other types of components **402** which may be equipped to provide such data in whole or part. In this manner, a comprehensive representation of the components **402** in the relevant vicinity of working surface **407** can be created. Such comprehensive representation can then be used in constructing and/or maintaining a virtual representation of components **402**, working surface **407**, and/or mobile agents **104**, as well as for reconciling physical positions and orientations of components **402**, working surface **407**, and/or mobile agents **104** with corresponding virtual representations, as described in related U.S. Utility application Ser. No. 13/963,638 for "Integration of a Robotic System with One or More Computing Devices", filed on Aug. 9, 2013.

Because of the possibility that information regarding component type, position and/or location derived from separate mobile agents **104** may not agree precisely, in at least one embodiment a mechanism may be implemented for reconciling differences in constructing and maintaining a single representation of the operating environment. Data can be prioritized according to potential error, such that data with the lowest error carries greater weight in aggregating information from separate sources than does data with the larger error.

For example, suppose two mobile agents **104** observe the same component **402** from separate locations on working surface **407**, one from a vantage close to component **402** and the other from a location farther away. If mobile agents **104** derive their own position and orientation information from working surface **407** with the same level of accuracy and both are employing the same camera imaging technology to observe component **402**, then it is expected that mobile agent **104** positioned closer to component **402** will in most cases provide more reliable information regarding the spatial disposition of the mutually regarded component **402** than will agent **104** positioned farther away. Various factors may affect the quality of data in such an example, such as differences in viewing angle or if one mobile agent **104** is observing component **402** while moving, or if one has a partly obstructed view. Other differences may also exist in conditions of observation. In at least one embodiment, any or all of such factors can be taken into account in prioritizing data from the two sources.

One skilled in the art will recognize that other schemes can be used for prioritizing inconsistent data received from different sources.

In at least one embodiment, mobile agents **104** (and/or other components **402**) engage in ongoing monitoring and/or exploration so as to construct and maintain an accurate virtual representation of the physical state of the environment including the working surface. In at least one embodiment, it may be expected that mobile agents **104** will be introduced to a space already populated with components **402**. Also, in some situations, component **402** configurations may change in ways that are difficult to predict, such as when an assembly may collapse accidentally or is deconstructed deliberately. In either case, agents **104** may be configured to recognize discrepancies between the physical state and the virtual representation that has been constructed.

As discussed herein, in cases of conflict between the virtual representation and the physical positions of agents **104** and/or components **402**, appropriate adjustments can be made to either or both of the physical positions and/or the virtual representation. Priority can be given to either the virtual or physical, as appropriate.

Referring now to FIG. **8**, there is shown a flowchart describing a process that mobile agents **104** may employ on an ongoing basis to maintain parity between the virtual state and the physical state. Steps and functions depicted in FIG. **8** may be a mobile agent's **104** sole, distinct task, or they may be combined with other activities and may even be performed concurrently with such other activities. Additional techniques for such reconciliation are described, for example, in related U.S. Utility application Ser. No. 13/963,638 for "Integration of a Robotic System with One or More Computing Devices", filed on Aug. 9, 2013, which is incorporated herein by reference.

The method begins **800**. Initially, mobile agent **104** is in an OBSERVE & MONITOR state **801**, which may be implemented as a service function that may be performed concurrently with other tasks. While in this state, agent **104** is able to detect events and/or receive information from external sources, either from other mobile agents **104** or received through alternative forms of event notification. For example, mobile agent **104** may detect a sound consistent with falling components **402** or vibrations in the working surface picked up by an accelerometer.

In at least one embodiment, if in step **802**, no event is detected, agent **104** determines **803** whether all areas of working surface **407** have been explored; if so, the method returns to OBSERVE & MONITOR state **801**. If areas remain unexplored, in at least one embodiment, further exploration can be performed, for example by making certain adjustments **804** such as shifting position on working surface **407**, changing orientation, and/or performing some other operations. The method then returns to OBSERVE & MONITOR state **801**.

In response to detection **802** of an event, for example by mobile agent **104** detecting the presence of a component **402**, component recognition step **805** begins. Here, mobile agent **104** attempts to recognize the component **402** whose state has changed. If a component **402** is successfully recognized, mobile agent **104** performs a REPORT & UPDATE step **808**, wherein resulting information regarding component type, position and orientation are updated in the virtual representation of the physical space. Once the event has been reported, and the virtual environment updated accordingly **808**, the method returns to OBSERVE & MONITOR state **801**.

Detection **802** and recognition **805** can be performed in response to minor occurrences, such as when a component **402** position is modified slightly in response to superior observational data, or to more major occurrences, such as when a component **402** is moved a long distance, or when a scatter of fallen components **402** is suddenly detected on working surface **407**, or when a stacked component **402** assembly suddenly disappears from its previous location as a consequence of collapse or unexpected removal.

If, in step **805**, the detected component **402** is not successfully recognized, in at least one embodiment mobile agent **104** may determine **806** whether an alternative vantage point is possible; if so, agent **104** attempts to adjust **807** its vantage point, while maintaining its focus on the unrecognized component **402** until it has either identified component **402** or exhausted available vantages in which to do so. After adjusting **807**, the method returns to step **801** so that detection **802** and recognition **805** can be attempted again.

In at least one embodiment, if no alternative vantage points are possible in step **806**, mobile agent **104** may determine **809** whether user assistance may be available, and if so, request assistance **811** from a user (or other source). In at least one embodiment, such a request may be performed by notifying the user that there are aspects of the physical state that the system or its mobile agents **104** cannot recognize. In response to such notification, the user may be able to provide adequate resolution, for example by disaggregating a jumbled pile of blocks that would be otherwise recognizable and/or by removing non-block components **402** that may be present on working surface **407** (i.e., items foreign to the ecosystem of components **402** that are recognizable as blocks).

If, in step **809**, user assistance is unavailable, mobile agent **104** may attempt **810** to execute the previously described disaggregation and removal process itself. For example, mobile agent **104** may use any suitable technique to determine when to cease attempts to identify a component **402** or other object and instead attempt to remove it from working surface **407** (by pushing it off, for example); such a decision may be made automatically by mobile agent **104** or host device **108**, or some other component, based for example on reaching a predetermined number of failed attempts to identify component **402**, and/or other criteria.

It should be noted that, in at least one embodiment, the process flow shown in FIG. **8** does not indicate completion, but rather a loop that returns to the OBSERVE & MONITOR step **801**, although operation can end at any suitable time based on some trigger event, command, or other condition.

In at least one embodiment, any number of mobile agents **104** may simultaneously execute process flows similar to that depicted in FIG. **8**; such parallel operation may result in a more accurate representation of the physical space in the environment of working surface **407** faster than would result from a single agent **104**. The use of multiple agents **104** can provide opportunities for improved process flow. For example, in cases of an initial failure to recognize an object, multiple agents **104** can simultaneously collect and share observation data, increasing the likelihood of successful recognition of a component **402** or other object. Similarly, agents **104** can cooperate to facilitate improved efficiency when disaggregating components **402** or other objects.

Providing mobile agents **104** with the ability to detect changes in the physical state of the environment around working surface **407** allows the system and method to maintain coherence between the physical state and the virtual representation of it that is used as a basis for planning and execution of actions. Although robust capacity in this regard can yield favorable responsiveness to changes, a lag in detecting a change need not necessarily reduce the level of engagement the system elicits from a user. In fact, the time required for a mobile agent **104** to detect an unexpected or unplanned change in its environment can be a source of entertainment for users. One can imagine some users altering component **402** configuration or placement at a moment that a mobile agent **104** is not well disposed to detect the change event, and then waiting to see how long it will take for mobile agent **104** to detect the difference, recognize the change, and subsequently determine what action, if any, to take in response.

The operation of multiple mobile agents **104** relying on a shared representation of the working space lends itself toward organizing cooperation among mobile agents **104** to execute tasks. Accordingly, in at least one embodiment, a plurality of mobile agents **104** may individually contribute to a shared objective, or may share a task. For example, two mobile agents **104** might carry a single component **402** or an assembly of components **402** which by itself might be too bulky or too heavy or otherwise too unwieldy to be managed by a single mobile agent **104**.

Referring now to FIG. **9**, there is shown an example in which two mobile agents **104** engage and lift a physical load (component **402**F), each from either end of component **402**F. Agents **104** then move in coordination to the intended location for their shared cargo. Such a task requires both planning and motion control, as well as mechanics that permit such collaboration. For example, as shown in the right-hand side of FIG. **9**, moving component **402**F along arc **901** requires steering operations to be coordinated between the two agents **104**, as described in more detail below.

In various embodiments, the means of locomotion designed into mobile agents **104** can take any of several forms, including for example legged systems, rolling systems such as tracks or wheels, and/or the like. The particular locomotive techniques described and depicted herein are merely exemplary. In at least one embodiment, different agents **104** can have different locomotive means; in at least one embodiment, the system and method take into account the nature of the locomotive means for various mobile agents **104** (and their respective capabilities and/or limitations) in planning and executing actions, including cooperative actions.

In the current example of FIG. **9**, it may be deemed important that the mobile agents have either an ability to move arbitrarily in any vector within the horizontal plane parallel to the working surface without rotating (such as a leg assembly with degrees of freedom analogous to a crab) or the ability to rotate their locomotion systems with respect to their hardware

used to lift and control components **402**. Thus, in at least one embodiment, the system takes into account such flexibility in considering how two mobile agents transporting a shared cargo would turn, as shown in the example of FIG. **9**.

Specifically, as described above, FIG. **9** depicts two mobile agents **104** cooperate in transporting component **402**F. The left-hand side of FIG. **9** shows an arrangement for transport in a straight line, while the right-hand side illustrates the importance of a mechanical system that permits rotation of each agent's **104** mobility system independent of its hoisting and carriage system when the path of travel deviates from a straight line (such as along arc **901**). Universal legs **902** permit their rotation as a single cohesive unit while a moving platform **903** connected to a lifting system via a rotational joint allows tracked or wheeled agents **104** to serve as hinge points in the transport of shared cargo (such as component **402**F). The particular system described herein provides unique advantages in addressing the complexity involved in coordinated transport of components **402**; by using a network architecture based around a centralizing control in a peer device, the system and method are able to more easily coordinate such work among a number of mobile agents **104**.

In some cases, spatial constraints in building component assemblies may preclude convenient placement of a component **402** at its final position. For example, if the intention is to slide a component **402** carried by two mobile agents **104** into a narrow space between two already-present components **402**, then, depending on mechanical design and spatial configuration, it may not be possible for agents **104** to place the carried component **402** directly into its final position. In such instances, the planning system or method coordinating the motion of the two mobile agents **104** may, for example, cause mobile agents **104** to place the assembly at a convenient location near the final position and to subsequently position the assembly via some alternative means (such as single or coordinated pushing into the desired position).

Emotion

In at least one embodiment, the system provides a robust platform of situational awareness that can sustain learning, sophisticated interactions among mobile agents **104** as well as meaningful expressions of emotion in the course of executing their tasks. Such a response system may assume many forms. In some instances, the emotions may provide an added level of richness to the experience without substantially altering the underlying execution of tasks performed by mobile agents **104**. In other cases, emotional responses to events may bear consequence on the sequence or execution of tasks whether in process or those planned.

Referring now to FIG. **10**, there is shown a process flowchart outlining a scenario in which a mobile agent **104** requests a component **402** from a user, according to one embodiment. Initially, assistance is requested **1001** from the user, specifically asking the user to place a block at a certain location proximate to mobile agent **104**. Once the request has been made, a waiting period begins **1002** during which agent **104** monitors events occurring on working surface **407**, either through observation or reported by other mobile agents **104**, or some combination thereof. Events are examined in comparison with the agent's **104** request, to determine if there is a match signifying the fulfillment of the request. If a relevant event is detected or reported **1003**, and recognized **1005**, and determined **1006** to match the request, then mobile agent **104** resumes **1007** the task that prompted the request for assistance at the outset of the process, and the method ends **1099**.

If, in step **1005**, the event is not recognized, or in step **1006**, the event is determined to not match the request, then the method returns to step **1002**.

During this process and until an event matching the request occurs, elapsed time is monitored **1004** against a limit, t_a; exceeding the limit prompts a return to step **1001**, wherein the user is again asked for assistance.

Referring now to FIG. **11**, there is shown a process that supports the same outcomes as shown in FIG. **10**, but includes emotional considerations as additional outcomes and/or states. The introduction of these potential emotional responses and/or states provides for a more complex interaction in this example. In some cases, these new outcomes are not the same as the expected outcome that would occur in the absence of an emotional state (as described above in connection with FIG. **10**). In the genre of entertainment products, such unexpected results can be appreciated for the surprise and diversity they may represent.

In the present example, the emotional states that may be provided in connection with the task are identified under broad categories (positive, negative, moderating and confused), although these are presented solely as examples. One will appreciate that the particular states that can be presented, and how they are embodied, can vary.

In addition, in at least one embodiment, such emotional considerations can influence parameters such as, for example, how long an agent **104** is willing to wait (t_a) or how many times a request may be repeated (A_r). Since emotions may manifest themselves in many different ways, other embodiments can provide and implement other emotional responses, including simulations of personality.

Referring now also to FIG. **2**, there is shown a table **201** depicting a set of responses and parameters that inform actions at various steps in the process according to a generalized personality type. For instance, a mobile agent **104** fitting the "extroverted positive" personality type exhibits emotional responses that exhibit greater patience, friendlier engagement and is more likely to yield the favored outcome than a mobile agent whose personality profile is "sensitive negative".

Such responses can be directly applicable to the method depicted above in connection with FIG. **11**. If no event is detected **1003** while the mobile agent is in the WAIT state, the method checks **1004** whether elapsed time has reaches some predetermined duration t_a; once t_a has been reached, the method determines **1102** whether the number of help requests made to the user exceeds some predetermined quantity A_r. If the number of help requests has not yet exceeded A_r, then the method returns to step **1001** to repeat the request. If, in step **1102**, the number of help requests has exceeded A_r, then agent **104** exhibits **1103** a negative emotional expression and/or physical action, and the method ends **1199**. Examples of negative emotional expression and/or physical actions for the various personality types are shown in table **201** of FIG. **2**.

As shown in the table of FIG. **2**, t_a and A_r can vary depending on the personality type of mobile agent **104**. In this manner, duration during which an extroverted positive mobile agent **104** will wait before repeating the original request may be made longer than the duration a sensitive negative mobile agent **104** will wait, and neither will wait as long as a reserved positive mobile agent **104** will wait. Similarly, a sensitive negative mobile agent **104** will not repeat the original request (A_r=1) after t_a is reached and will instead respond to the unsatisfied request with a Negative Emotional Expression and/or Negative Physical Action **1103**.

FIG. **11** also includes other instances in which an emotional expression and/or physical action can be exhibited. For example, if an event is detected or reported **1003**, but the event is not recognized **1005**, agent **104** can exhibit **1101** a confused emotional expression and/or physical action before returning

to step **1001**. As another example, if an event is detected **1003**, recognized **1005**, and determined **1006** to match the request, a determination is made **1104** as to whether the elapsed time t or the number of help requests A had previously exceeded the respective threshold value t_a and A_r. If so, in at least one embodiment, agent **104** exhibits **1105** a moderating emotional expression and/or physical action and then exhibits **1106** a positive emotional expression and/or physical action before resuming **1107** its task. If the elapsed time t or the number of help requests A had not previously exceeded the respective threshold value t_a and A_r, then agent **104** does not exhibit **1105** the moderating emotional expression and/or physical action, but merely proceeds directly to the positive emotional expression and/or physical action before resuming **1107** its task. Other variations are possible, depending on particular characteristics and events.

FIG. **2** describes what actions constitute various types of responses for different personality types of mobile agents **104**. In general, the personality types profiled in the table can serve as shorthand designation for the responses and parameters associated with each one.

The table in FIG. **2** is intended to serve as an example; one skilled in the art will recognize that many different approaches can be used when defining personalities and according tendencies or traits to them according to the techniques described herein. In the example of FIG. **2**, a table provides set responses corresponding to particular steps or states in a process flow. Other representations are possible, however; for example, in another embodiment, personality parameters can be defined in terms of points on a scale between opposing characteristics. Referring now to FIG. **3**, there is shown a table **301** setting forth a number of examples of characteristics that may be employed in such a scheme. Such an approach can yield a more diverse set of personalities than can generally be defined using discrete types.

Any number of characteristics can be used in defining the dimensions of personality. While a large number of parameters defining a personality type can yield subtleties that might elude a shorter set of parameters, the ability to understand how traits might combine into a global behavioral nature can be more difficult to grasp. In at least one embodiment, the system may impose constraints on the number of traits or correlations that can be assigned to a particular agent **104**, so as to ensure that resulting behaviors are at least somewhat coherent (for example, to avoid defining a personality that is once fully disciplined and fully reckless, or one that is both fully impassive and fully extroverted).

The distillation of behavioral traits into a form that suits mathematical models that predict action has been the subject of an appreciable research in certain segments of the field of psychology. Modeling techniques for behavior and decisions are also known in the field of artificial intelligence. In at least one embodiment, the system makes use of a system to determine a mobile agent's **104** emotional disposition and emotional response to events occurring around it. The system serves to connect a dynamic system of emotions to events occurring in the physical environment, and further relates that system's impact on events occurring in the physical environment.

In at least one embodiment, emotional responses may play a significant role in the operation of the system described herein. Not only can the system impart emotive capacity to mobile agents **104** executing physical tasks, but it also can provide further functionality associated with the building structures created by such mobile agents **104**.

In at least one embodiment, emotion can be incorporated in behaviors of mobile agents **104** in non-functional ways, for example to introduce sounds, gestures, or other actions and/or output that do not significantly affect the tasks being performed by agents **104**. In other embodiments, however, emotions (defined, for example, by the personality profile of a mobile agent **104**) can influence the functional operation of a mobile agent **104**. By coupling the system of expressing emotions appropriate to a given situation with a mobile agent's **104** ability to perform tasks, the system is able to create an even more compelling projection of cognizance and personality. In at least one embodiment, parameters of personality can be made to serve as inputs into a model that includes potential actions available to a mobile agent **104**, so as to affect behaviors of mobile agents **104** in functional and substantive ways, causing the results to diverge significantly from what is possible with a system that has no emotive component to it.

Referring now to FIG. **12**, there is shown an example wherein a mobile agent **104** requests a component **402** from a user. As shown in the Figure, there are six states **1202** of constructed components **402**, each with two separate component assemblies **1201**Y, **1201**Z. In this scenario, each component assembly **1201**Y, **1201**Z is the result of a different mobile agent's **104** ongoing work, and the assembly **1201**Y on the left side is under construction by a robot that requests a component **402** from a user. Each of the six states **1202** portrays different instances of construction. The left-hand column of states **1202**A1, **1202**A2, **1202**A3 is a progressive sequence of construction stages in which emotions do not influence the course of tasks executed by mobile agents. The right-hand column of states **1202**B1, **1202**B2, **1202**B3 is a similar progression, but one in which mobile agents **104** display (or model) emotions that potentially influence their course of action.

States **1202**A1 and **1202**B1 are identical and indicate a matching starting point for this example. In both scenarios, a mobile agent **104** constructing the component assembly **1201**Y on the left signals a request to a user for two components **402** to add to its assembly **1201**Y; in both scenarios, the user does not respond within the time limit dictating how long the mobile agent will wait before repeating the request (as described above in connection with FIG. **11**).

On the left-hand side of FIG. **12**, the consequence of the delay is apparent in the absence of new construction from state **1202**A1 to state **1202**A2. The mobile agent **104** repeats its request (per the method of FIG. **11**) and continues to wait.

On the right-hand side of FIG. **12**, however, mobile agent's **104** course of action is affected by its emotional response to the long wait time. For purposes of illustration, it is convenient to a imagine that the characteristics defining the personality profile of a mobile agent **104** include scaling traits such as "disciplined" on one end of a scale and "capricious" as its opposing limit, or "empathetic" and "indifferent" as opposite limits. In the depicted example, the mobile agent requesting the component **402** is described by a parametric setting that is substantially closer to capricious than to disciplined and likewise closer to aloof than to empathetic, as well as demonstrating tendencies closer to "rebellious" than to "obedient". Accordingly, this combination of settings is likely to describe a personality more inclined to disregard proper process in the execution of its primary task.

In the example, the system allows emotional responses to influence actions taken in the physical environment. Thus, from initial state **1202**B1, the mobile agent **104** having the above-described characteristics is less likely to endure a lengthy wait for a user to provide requested component(s) **402**. The mobile agent **104** might recognize that the neighboring assembly **1201**Z contains components **402** that match

those it requested from the user. Given its emotional disposition and a control system that permits its personality traits (i.e., rebellious, indifferent and capricious) to influence its decisions, the mobile agent **104** may be inclined to steal the components **402** from neighboring assembly **1201**Z to place in its own assembly **1201**Y. State **1202**B**2** indicates the result of such an action, in which two components **402** from assembly **1201**Z have been placed into assembly **1201**Y. The consequence of such an action exhibits how a system that enables emotional response to influence the planning and execution of physical action can sharply affect the course of events planned according to non-emotional considerations (e.g., efficiency).

One can appreciate that the emotional influences in the described example can persist through the sequence of all subsequent events. For example, if the mobile agent **104** engaged in building assembly **1201**Z (from component(s) **402** have been stolen) has a personality profile of short temperament and capriciousness, the agent **104** may recognize the act of theft (afforded by the larger system's monitoring of all events and actions taken by mobile agents), and may retaliate. Accordingly, in state **1202**B**3**, assembly **1201**Y has been dismantled or destroyed, a potential outcome when a short-tempered neighbor agent **104** responds physically and vindictively to a mobile agent **104** having stolen components **402** from its assembly **1201**Z for use in assembly **1201**Y.

A comparison of states **1202**A**3** and **1202**B**3** illustrates how the introduction of an emotional system responsive to physical events to the planning and execution activities of mobile agents **104** can alter the course of events in the physical environment. State **1202**A**3** is the end state of a system adhering to processes focused solely achieving a planned end state. State **1202**B**3** exhibits a case in which the emotional dispositions ascribed to mobile agents **104** are permitted to influence their individual planning and execution of tasks. In State **1202**A**3**, a delay in a user satisfying a mobile agent's **104** request for components **402** would likely only delay the execution of the mobile agent's **104** intended use for the components **402**. By contrast, in state **1202**B**3**, a mobile agent **104** displays emotional characteristics such as impatience and a weak notion of discipline and empathy; this has prompted events that led to a state **1202**B**3** that is farther away from the goal achieved in State **1202**A**3**.

In at least one embodiment, mobile agents **104** may assume many different forms and may also assume specialized roles; for example, a mobile agent **104** may have a primary role of supervision. In one capacity, such supervision may be useful for the coordination of numerous mobile agents **104** engaged in a task that is particularly complex relative to the capability of the individual agents **104**. In at least one embodiment, mobile agents **104** serving a supervisory role may provide a quelling or remediating effect on mobile agents **104** who might have fallen into dispute over the actions of one or both, a potentially important role if one or more of the agents **104** have personality profiles that would yield volatile tendencies.

An agent **104** can perform a supervisory role by any suitable means; for example, it can observe behavior of other agents **104** based on physical proximity and/or line-of-sight to a team of agents **104** working in collaboration or within the same space. As discussed above, in at least one embodiment, the system maintains a virtual model that tracks the location of agents **104** in space; accordingly, the system can use such a model to determine whether a supervisory agent **104** is within a critical threshold distance of a potentially volatile group of agents **104**. Other techniques can also be used, for example by ascribing a probability to the efficacy of a supervisory agent **104** that varies with distance, or by combining distance with line-of-sight such that the ability of a supervisory agent **104** to maintain order among other and potentially unruly or conflicting agents **104** relies both on proximity and whether the supervisory agent has the agents under supervision within its field of view. Probabilistic determinations may also factor in additional elements, such as the temperament of an agent **104** who may be inclined to act out; for example, agents **104** that might be in more volatile states might be more likely to act out despite the relative proximity of a supervisory agent **104**. In this fashion, the similarities to stereotypes of humans acting badly become evident: an agent **104** may be more likely to exhibit negative behaviors or act against another agent **104** if the supervisory agent **104** is far enough away or otherwise unable to supervise effectively (for example, if it is in reasonable proximity but the focus of its attention (e.g., camera or imager or general orientation of the agent) is directed elsewhere).

In the descriptions provided herein, the term "emotion" encompasses a variety of facets related to a mobile agent's **104** expressions and actions that are not likely to be a critical part of its intended task. These might include, for example, indications of satisfaction or discouragement, or they might manifest themselves in a way that bears direct physical consequence on the course of planned events. For example, as described above in connection with FIG. **12**, unfavorable responses can disrupt the progress of an intended task or a series of tasks. Accordingly, in at least one embodiment, the system can make the implementation of certain tasks (such as construction of a component assembly) less predictable and therefore more surprising and interesting, particularly when multiple mobile agents **104** of variable personalities are participating in the undertaking of the task.

As described above, in some situations, inter-agent personality conflicts may confound progress toward a desired goal. In other situations, non-confrontational scenarios can occur where the interactions among agents **104** having personalities can be beneficial or detrimental. For example, mobile agents **104** that are assigned strong characteristics of impatience and recklessness may transport components **402** at greater speed and place them with less caution. The result may be faster completion of a structure, or slower construction owing to collapse events (or other destructive events) resulting from excessive haste and carelessness, requiring portions to be rebuilt.

Moreover, one can also consider circumstances which present risky opportunities, such as an assembly collapse that results in a component **402** tumbling beyond the perimeter edge of the working surface. As discussed earlier, mobile agents **104** can use component faces **503** as landmarks to supplement localization based on working surface **407**. In this instance, a mobile agent **104** might leave the bounds of working surface **407** in pursuit of an errant component **402**, relying on the component face **503** for navigation and likewise on components **402** on the working surface for navigation on the return trip. However, departing the working surface presents considerable risk since the nature of the navigable surface is unknown to the mobile agent **104**. Accordingly, a "daring" mobile agent **104** (such as one that has some strong combination of reckless, undisciplined and capricious traits) might venture off working surface **407** and either successfully return or be lost in the process. More obedient and cautious mobile agents **104** might request help from the user to retrieve the component **402**, or deem the component **402** as unreachable, rather than venturing off working surface **407**.

In at least one embodiment, mobile agents **104** can learn or develop associations to their "experiences", and can apply such associations to their subsequent actions, in combination

with planning and emotional responses. In this manner, such learning supplements the above-described capabilities of component **402** localization and communication among system components **402**. A working knowledge of all components **402** on working surface **407**, as well as functions that dictate emotional response, are in combination a robust basis for building a functional system for learning in meaningful way. In this respect, learning may assume the context of skills.

For example, in at least one embodiment, mobile agents **104** deployed for the first time might have a capacity for manipulating and transporting components **402** that is deliberately limited. After some period of time, agents **104** can acquire experience that causes their skill set to increase, for example based on cumulative operation time or the number of times simple actions are repeated. In at least one embodiment, the rate at which a mobile agent's **104** skill set expands can be tied directly to how much a user pushes the limits of the agent's **104** capabilities in developing designs for them to build.

In at least one embodiment, future behavior can be tied to specific events in the past of mobile agents **104**. For example, an agent **104** might proceed with greater caution in an assembly step that, in a past experience, resulted in an unfavorable event such as collapse. In at least one embodiment, an agent **104** can learn from past experience by, for example, adjusting its tendency to take risks based on the degree to which bolder actions in the past have led to favorable or unfavorable results.

In at least one embodiment, agents **104** can have affinities or relationships with one another, so that experiences of a first agent **104** can affect future behavior of other agent(s) **104**, such as those agent(s) **104** with whom the first agent **104** has an affinity or relationship.

Learning can also be applied to inform or influence the future behavior of mobile agents **104** in the realm of emotional response. Returning to the example shown in FIG. **12**, in which one mobile agent **104** stole components **402** from the assembly of a second mobile agent **104**: once the first mobile agent **104** sees the response of the second mobile agent **104** (knocking down the assembly of the first mobile agent **104**), the first mobile agent **104** may change its behavior in the presence of the second mobile agent **104** in later encounters. In fact, both agents **104** may change their future behavior with respect to one another based on the previous interaction, for example to simulate a reluctance to cooperate with one another or even a degree of animosity or resentment toward one another.

In at least one embodiment, the degree to which such behavior changes manifest can depend on characteristics imputed to the agents' **104** personalities and functions that determine response based on those characteristics. A mobile agent **104** with a high degree of patience, for example, may alter its behavior only very slightly, if at all, in a subsequent encounter with a mobile agent **104** that had previously disrupted its operation. A less patient agent **104** may more quickly react to a negative action taken by another agent **104**. In addition, in at least one embodiment, new experiences can shift dispositions and the effects of a single event can be made to fade in time without reinforcement by repetition.

The above description and referenced drawings set forth particular details with respect to possible embodiments. Those of skill in the art will appreciate that other embodiments are possible. First, the particular naming of the components, capitalization of terms, the attributes, data structures, or any other programming or structural aspect is not mandatory or significant, and the mechanisms described herein may have different names, formats, or protocols. Further, the system may be implemented via a combination of hardware and software, or entirely in hardware elements, or entirely in software elements. Also, the particular division of functionality between the various system components described herein is merely exemplary, and not mandatory; functions performed by a single system component may instead be performed by multiple components, and functions performed by multiple components may instead be performed by a single component.

Reference in the specification to "one embodiment" or to "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiments is included in at least one embodiment. The appearances of the phrases "in one embodiment" or "in at least one embodiment" in various places in the specification are not necessarily all referring to the same embodiment.

Some embodiments may include a system or a method for performing the above-described techniques, either singly or in any combination. Other embodiments may include a computer program product comprising a non-transitory computer-readable storage medium and computer program code, encoded on the medium, for causing a processor in a computing device or other electronic device to perform the above-described techniques.

Some portions of the above are presented in terms of algorithms and symbolic representations of operations on data bits within a memory of a computing device. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally, conceived to be a self-consistent sequence of steps (instructions) leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical, magnetic or optical signals capable of being stored, transferred, combined, compared and otherwise manipulated. It is convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like. Furthermore, it is also convenient at times, to refer to certain arrangements of steps requiring physical manipulations of physical quantities as modules or code devices, without loss of generality.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussion, it is appreciated that throughout the description, discussions utilizing terms such as "processing" or "computing" or "calculating" or "displaying" or "determining" or the like, refer to the action and processes of a computer system, or similar electronic computing module and/or device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system memories or registers or other such information storage, transmission or display devices.

Certain aspects include process steps and instructions described herein in the form of an algorithm. It should be noted that the process steps and instructions can be embodied in software, firmware and/or hardware, and when embodied in software, can be downloaded to reside on and be operated from different platforms used by a variety of operating systems.

Some embodiments relate to an apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, or it may comprise a general-purpose computing device selectively activated or reconfigured by a computer program stored in the computing device. Such a computer program may be stored in a computer readable storage medium, such as, but is not limited to, any type of disk including floppy disks, optical disks, CD-ROMs, DVD-ROMs, magnetic-optical disks, read-only memories (ROMs), random access memories (RAMs), EPROMs, EEPROMs, flash memory, solid state drives, magnetic or optical cards, application specific integrated circuits (ASICs), or any type of media suitable for storing electronic instructions, and each coupled to a computer system bus. Further, the computing devices referred to herein may include a single processor or may be architectures employing multiple processor designs for increased computing capability.

The algorithms and displays presented herein are not inherently related to any particular computing device, virtualized system, or other apparatus. Various general-purpose systems may also be used with programs in accordance with the teachings herein, or it may prove convenient to construct more specialized apparatus to perform the required method steps. The required structure for a variety of these systems will be apparent from the description provided herein. In addition, the system and method set forth herein are not described with reference to any particular programming language. It will be appreciated that a variety of programming languages may be used to implement the teachings described herein, and any references above to specific languages are provided for illustrative purposes only.

Accordingly, various embodiments may include software, hardware, and/or other elements for controlling a computer system, computing device, or other electronic device, or any combination or plurality thereof. Such an electronic device can include, for example, a processor, an input device (such as a keyboard, mouse, touchpad, track pad, joystick, trackball, microphone, and/or any combination thereof), an output device (such as a screen, speaker, and/or the like), memory, long-term storage (such as magnetic storage, optical storage, and/or the like), and/or network connectivity, according to techniques that are well known in the art. Such an electronic device may be portable or non-portable. Examples of electronic devices that may be used include: a mobile phone, personal digital assistant, smartphone, kiosk, server computer, enterprise computing device, desktop computer, laptop computer, tablet computer, consumer electronic device, or the like. An electronic device for implementing the system or method described herein may use any operating system such as, for example and without limitation: Linux; Microsoft Windows, available from Microsoft Corporation of Redmond, Wash.; Mac OS X, available from Apple Inc. of Cupertino, Calif.; iOS, available from Apple Inc. of Cupertino, Calif.; Android, available from Google, Inc. of Mountain View, Calif.; and/or any other operating system that is adapted for use on the device.

While a limited number of embodiments has been described herein, those skilled in the art, having benefit of the above description, will appreciate that other embodiments may be devised which do not depart from the scope of the claims. In addition, it should be noted that the language used in the specification has been principally selected for readability and instructional purposes, and may not have been selected to delineate or circumscribe the inventive subject matter. Accordingly, this disclosure is intended to be illustrative, but not limiting.

What is claimed is:

1. A system for manipulating components, comprising:
a working surface;
at least one discrete manipulable component; and
at least one mobile agent, configured to manipulate at least one component on the working surface to perform a task for entertainment of an observer, comprising:
a processor;
a sensor, communicatively coupled to the processor, configured to detect the at least one component;
a propulsion mechanism, communicatively coupled to the processor, configured to impart motive force to the mobile agent; and
at least one actuator, communicatively coupled to the processor, configured to manipulate the at least one component to perform the task responsive to instructions;
wherein the mobile agent is further configured to exhibit at least one personality trait that enhances entertainment value of observing the mobile agent;
and wherein exhibition of the at least one personality trait does not result in increased efficiency in performance of the task.

2. The system of claim **1**, wherein the mobile agent is further configured to change at least one exhibited personality trait based on at least one of experience and learning, to further enhance the entertainment value of observing the mobile agent.

3. The system of claim **1**, wherein:
the instructions are directed toward completion of the task;
the at least one mobile agent comprises a plurality of mobile agents; and
at least one of the plurality of mobile agents is configured to cooperate with at least one other of the plurality of mobile agents in performing the task.

4. The system of claim **1**, wherein the at least one mobile agent comprises a plurality of mobile agents, and wherein at least one of the plurality of mobile agents is configured to react to behavior of at least one other of the plurality of mobile agents.

5. The system of claim **3**, wherein at least one discrete manipulable component comprises a construction element, and wherein the task comprises a construction task.

6. The system of claim **1**, wherein the sensor is configured to recognize the at least one component and to identify a position and orientation of the at least one component.

7. The system of claim **6**, wherein at least one machine-readable code appears on the at least one component, and wherein the at least one mobile agent is configured to recognize the at least one component by reading the at least one machine-readable code.

8. The system of claim **1**, wherein the at least one mobile agent is configured to automatically determine its position with respect to the working surface.

9. The system of claim **8**, wherein the working surface comprises at least one machine-readable code, and wherein the at least one mobile agent is configured to automatically determine its position by reading the at least one machine-readable code.

10. The system of claim **1**, further comprising:
a base station;
and wherein the at least one mobile agent further comprises a communication module, communicatively coupled to the processor, configured to communicate with the base station.

11. The system of claim 10, wherein the base station is configured to maintain a virtual representation of the relative positions of the at least one mobile agent and the at least one component.

12. The system of claim 10, wherein the base station is configured to maintain parity between the virtual representation and detected physical positions of the at least one mobile agent and the at least one component by adjusting the virtual representation in response to detected physical positions.

13. The system of claim 10, wherein the base station is configured to maintain parity between the virtual representation and detected physical positions of the at least one mobile agent and the at least one component by transmitting signals to at least one mobile agent to cause the at least one mobile agent to adjust its physical position to comport with the virtual representation.

14. The system of claim 1, further comprising an artificial intelligence module, wherein the instructions are based on output of the artificial intelligence module.

15. In a system comprising a working surface, at least one discrete manipulable component, and at least one mobile agent having a processor, a method for manipulating the at least one component, comprising:

in a processor of one of the mobile agents, causing a propulsion mechanism of the mobile agent to impart motive force to the mobile agent;

in a sensor of the mobile agent, detecting the at least one component; and

in the processor, causing at least one actuator of the mobile agent to manipulate the at least one component responsive to instructions; and

in the processor, causing the mobile agent to exhibit at least one personality trait that enhances entertainment value of observing the mobile agent;

wherein exhibition of the at least one personality trait does not result in increased efficiency in performance of the task.

16. The method of claim 15, wherein:

the instructions are directed toward completion of the task; and

the system comprises a plurality of mobile agents;

and wherein the method further comprises, in a processor of at least one of the mobile agents, causing the mobile agent to cooperate with at least one other of the plurality of mobile agents in performing the task.

17. The method of claim 15, wherein the system comprises a plurality of mobile agents, and wherein the method further comprises, in a processor of at least one of the mobile agents, causing the mobile agent to react to behavior of at least one other of the plurality of mobile agents.

18. The method of claim 15, wherein the system comprises a plurality of mobile agents, and wherein the method further comprises, in a processor of at least one of the mobile agents, causing the mobile agent to exhibit hostility toward at least one other of the plurality of mobile agents in response to an action of the other mobile agent.

19. The method of claim 16, wherein at least one discrete manipulable component comprises a construction element, and wherein the task comprises a construction task.

20. The method of claim 15, further comprising, in the sensor, recognizing the at least one component and identifying a position and orientation of the at least one component.

21. The method of claim 20, wherein the at least one component comprises at least one machine-readable code, and wherein recognizing the at least one component comprises reading the at least one machine-readable code.

22. The method of claim 15, further comprising, in the processor, automatically determining the position of the mobile agent with respect to the working surface.

23. The method of claim 22, wherein the working surface comprises at least one machine-readable code, and wherein automatically determining the position of the mobile agent comprises reading the at least one machine-readable code.

24. The method of claim 15, further comprising, in the processor, causing the mobile agent to communicate with a base station.

25. The method of claim 24, further comprising:

maintaining a virtual representation of the relative positions of the at least one mobile agent and the at least one component; and

maintaining parity between the virtual representation and detected physical positions of the at least one mobile agent and the at least one component by adjusting the virtual representation in response to detected physical positions.

26. The method of claim 24, further comprising:

maintaining a virtual representation of the relative positions of the at least one mobile agent and the at least one component; and

maintaining parity between the virtual representation and detected physical positions of the at least one mobile agent and the at least one component by transmitting signals to at least one mobile agent to cause the at least one mobile agent to adjust its physical position to comport with the virtual representation.

27. The system of claim 1, wherein the at least one mobile agent comprises a plurality of mobile agents having different personality traits.

28. The method of claim 15, wherein the at least one mobile agent comprises a plurality of mobile agents having different personality traits.

* * * * *